

INTERNATIONAL  
STANDARD

**ISO**  
**7010**

Third edition  
2019-07

---

---

**Graphical symbols — Safety colours  
and safety signs — Registered safety  
signs**

*Symboles graphiques — Couleurs de sécurité et signaux de sécurité —  
Signaux de sécurité enregistrés*



Reference number  
ISO 7010:2019(E)

© ISO 2019



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

<b>Contents</b>		Page
<b>Foreword</b> .....		<b>iv</b>
<b>Introduction</b> .....		<b>vi</b>
<b>1 Scope</b> .....		<b>1</b>
<b>2 Normative references</b> .....		<b>1</b>
<b>3 Terms and definitions</b> .....		<b>1</b>
<b>4 Referents and categorization of safety signs</b> .....		<b>2</b>
4.1 General.....		<b>2</b>
4.2 Referent (safety meaning).....		<b>2</b>
4.3 Categorization of safety signs.....		<b>8</b>
<b>5 Registered safety signs</b> .....		<b>9</b>
<b>Bibliography</b> .....		<b>298</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 145, *Graphical symbols*, Subcommittee SC 2, *Safety identification, signs, shapes, symbols and colours*.

This third edition cancels and replaces the second edition (ISO 7010:2011). The following changes have been made with respect to the previous edition:

The safety signs from

- ISO 7010:2011/Amd 1:2012,
- ISO 7010:2011/Amd 2:2012,
- ISO 7010:2011/Amd 3:2012,
- ISO 7010:2011/Amd 4:2013,
- ISO 7010:2011/Amd 5:2014,
- ISO 7010:2011/Amd 6:2014,
- ISO 7010:2011/Amd 7:2016,
- ISO 7010:2011/Amd 8:2017,
- ISO 7010:2011/Amd 9:2018,
- ISO 7010:2011/DAMD 240:2018,
- ISO 7010:2011/DAMD 241:2018,
- ISO 7010:2011/DAMD 242:2018 and
- ISO 20712-1:2008

have been incorporated with a few minor text adjustments.

This edition also cancels and replaces ISO 20712-1:2008.

All safety signs are available on the ISO Online browsing platform at <https://www.iso.org/obp>.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

There is a need to standardize a system of providing safety information that relies as little as possible on the use of words to achieve understanding.

Continued growth in international trade, travel and mobility of labour requires a common method of communicating safety information.

Lack of standardization may lead to confusion and the risk of accidents.

The use of standardized safety signs does not replace proper work methods, instructions and accident prevention training or measures. Education is an essential part of any system that provides safety information.

The safety signs are intended for use only where there is a risk to people. They may appear in safety signage in workplaces and public areas, safety manuals and notices, product labelling and escape and evacuation plans, as appropriate.

This document is intended to be used by all Technical Committees within ISO charged with developing specific safety signing for their industry, to ensure that there is only one safety sign for each safety meaning. It is also intended that this document be revised regularly to include safety signs as they are standardized by ISO, and which conform to the design principles given in the ISO 3864 series.

The safety signs in this document have been validated by ISO/TC 145/SC 2 according to procedures of standardization current at the time of publication.

NOTE 1 Some countries' statutory regulations might differ in some respects from those given in this document.

NOTE 2 Information on procedures, criteria of acceptability, safety sign templates and application of safety signs, as well as translations of the referents, can be found at <http://www.iso.org/tc145/sc2>.

# Graphical symbols — Safety colours and safety signs — Registered safety signs

**IMPORTANT** — The colours represented in the electronic file of this document can be neither viewed on screen nor printed as true representations. For the purposes of colour matching, see ISO 3864-4 which provides colorimetric and photometric properties together with, as a guideline, references from colour order systems.

## 1 Scope

This document prescribes safety signs for the purposes of accident prevention, fire protection, health hazard information and emergency evacuation.

The shape and colour of each safety sign are according to ISO 3864-1 and the design of the graphical symbols is according to ISO 3864-3.

This document is applicable to all locations where safety issues related to people need to be addressed. However, it is not applicable to the signalling used for guiding rail, road, river, maritime and air traffic and, in general, to those sectors subject to a regulation which may differ with regard to certain points of this document and of the ISO 3864 series.

This document specifies the safety sign originals that can be scaled for reproduction and application purposes.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3864-1, *Graphical symbols — Safety colours and safety signs — Part 1: Design principles for safety signs and safety markings*

ISO 3864-3, *Graphical symbols — Safety colours and safety signs — Part 3: Design principles for graphical symbols for use in safety signs*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1

#### **image content**

written description of the elements of a graphical symbol or safety sign and their relative disposition

### 3.2

#### **referent**

idea or object that a graphical symbol is intended to represent

3.3

**safety sign**

sign giving a general safety message, obtained by a combination of a colour and geometric shape and which, by the addition of a graphical symbol, gives a particular safety message

3.4

**safety sign original**

safety sign with which a referent, a graphical representation and a description of the application are associated

3.5

**supplementary sign**

sign that is supportive of another sign and the main purpose of which is to provide additional clarification

**4 Referents and categorization of safety signs**

**4.1 General**

The summaries in 4.2 and 4.3 are provided to facilitate the search for registered safety signs.

This document will be maintained electronically through the use of a database. The indexes of this database will be used in these summaries as search engines with each registered safety sign having a unique reference number.

**4.2 Referent (safety meaning)**

Table 1 gives the list of referents in alphabetical order and provides the safety sign functional reference number.

**Table 1 — Summary of referents in alphabetical order**

Referent (safety meaning)	Functional reference number
Alighting from toboggan to the left	M050
Alighting from toboggan to the right	M051
Arc flash; warning	W042
Asphyxiating atmosphere; warning	W041
Automated external heart defibrillator	E010
Automatic start-up; warning	W018
Barbed wire; warning	W033
Battery charging; warning	W026
Biological hazard; warning	W009
Boating area; warning	W058
Break to obtain access	E008
Bull; warning	W034
Check guard	M027
Child seat presence and orientation detection system (CPOD)	E014
Child's lifejacket	E045
Close and secure hatches in launch sequence	M037
Close safety bar of chairlift	M033
Connect an earth terminal to the ground	M005
Corrosive substance; warning	W023

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Counterrotating rollers; warning	W025
Crocodiles, alligators or caymans; warning	W067
Crushing; warning	W019
Crushing of hands; warning	W024
Davit-launched liferaft	E039
Deep shelving beach; warning	W066
Deep water; warning	W047
Disconnect before carrying out maintenance or repair	M021
Disconnect mains plug from electrical outlet	M006
Doctor	E009
Do not alter the state of the switch	P031
Do not expose to direct sunlight or hot surface	P068
Do not extinguish with water	P011
Do not leave the tow-track	P037
Do not obstruct	P023
Do not put finger into the nozzle of a hydromassage	P070
Do not ram into toboggans	P047
Do not set off fireworks	P040
Do not spray with water	P016
Do not stretch out of toboggan	P046
Do not swing the chair	P038
Do not tie knots in rope	P030
Do not touch	P010
Do not use for face grinding	P032
Do not use for wet grinding	P033
Do not use lift in the event of fire	P020
Do not use this device in a bathtub, shower or water-filled reservoir	P026
Do not use this incomplete scaffold	P025
Do not use this lift for people	P027
Do not use with hand-held grinding machine	P034
Do not walk or stand here	P024
Do not wear gloves	P028
Do not wear metal-studded footwear	P035
Door opens by pulling on the left-hand side	E057
Door opens by pulling on the right-hand side	E058
Door opens by pushing on the left-hand side	E022
Door opens by pushing on the right-hand side	E023
Door slides left to open	E034
Door slides right to open	E033
Drinking water	E015
Drop (fall); warning	W008
Electricity; warning	W012
Embarkation ladder	E053
Emergency escape breathing device	E029

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Emergency exit (left hand)	E001
Emergency exit (right hand)	E002
Emergency exit for people unable to walk or with walking impairment (left)	E026
Emergency exit for people unable to walk or with walking impairment (right)	E030
Emergency hammer	E025
Emergency position indicating radio beacon	E052
Emergency stop button	E020
Emergency telephone	E004
Emergency window with escape ladder	E016
Escape ladder	E059
Evacuation assembly point	E007
Evacuation chair	E060
Evacuation temporary refuge	E024
Explosive material; warning	W002
Eyewash station	E011
Falling ice; warning	W039
Falling objects; warning	W035
Fire alarm call point	F005
Fire blanket	F016
Fire emergency telephone	F006
Fire extinguisher	F001
Firefighting equipment, collection of	F004
Fire hose reel	F002
Fire monitor	F015
Fire ladder	F003
Fire protection door	F007
First aid	E003
Fixed fire extinguishing battery	F008
Fixed fire extinguishing bottle	F013
Fixed fire extinguishing installation	F012
Flammable material; warning	W021
Floor-level obstacle; warning	W007
Forklift trucks and other industrial vehicles; warning	W014
Fragile roof; warning	W036
General mandatory action sign	M001
General prohibition sign	P001
General warning sign	W001
Guard dog; warning	W013
Hand crushing between press brake and material; warning	W031
Hand crushing between press brake tool; warning	W030
High surf or large breaking waves; warning	W065
Hot surface; warning	W017

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Hot works prohibited	P039
Immediately leave the tow-track in the event of falling	M035
Incoming tides; warning	W060
Infant's lifejacket	E046
Keep children under supervision in the aquatic environment	M054
Keep distance between toboggans	M052
Keep locked	M028
Kite surfing; warning	W062
Laser beam; warning	W004
Lifeboat	E036
Lifebuoy	E040
Lifebuoy with light	E042
Lifebuoy with line	E041
Lifebuoy with line and light	E043
Lifejacket	E044
Liferaft	E038
Liferaft knife	E035
Lift ski tips	M036
Line-throwing appliance	E050
Low temperature/freezing conditions; warning	W010
Lower lifeboat to the water in launch sequence	M039
Lower liferaft to the water in launch sequence	M040
Lower rescue boat to the water in launch sequence	M041
Magnetic field; warning	W006
Marine evacuation chute	E055
Marine evacuation slide	E054
Medical grab bag	E027
No access for forklift trucks and other industrial vehicles	P006
No access for people with active implanted cardiac devices	P007
No access for people with metallic implants	P014
No activated mobile phones	P013
No body boarding	P063
No children allowed	P036
No climbing	P009
No diving	P052
No dogs	P021
No eating or drinking	P022
No heavy load	P012
No jumping into water	P061
No kite surfing	P065
No leaning against	P041
No manually powered craft	P055
No mechanically powered craft	P056
No metallic articles or watches	P008

Table 1 (continued)

Referent (safety meaning)	Functional reference number
No open flame; Fire, open ignition source and smoking prohibited	P003
No outdoor footwear	P060
No parasailing	P066
No personal water craft	P057
No photography	P029
No pushing	P017
No pushing into water	P062
No reaching in	P015
No running	P048
No sailing	P053
No sand yachting	P067
No sitting	P018
No smoking	P002
No snorkelling	P050
No stepping on surface	P019
No sub-aqua diving	P051
No surf craft	P059
No surfing between the red-and-yellow flags	P064
No swimming	P049
No thoroughfare	P004
No towed water activity	P058
No windsurfing	P054
Non-ionizing radiation; warning	W005
Not drinking water	P005
Not for people in the state of intoxication	P043
Not for pregnant women	P042
Not to be serviced by users	P069
Opaque eye protection must be worn	M007
Open safety bar of chairlift	M034
Optical radiation; warning	W027
Overhead load; warning	W015
Overhead obstacle; warning	W020
Oxidizing substance; warning	W028
Oxygen resuscitator	E028
Parasailing; warning	W063
Portable foam applicator unit	F010
Pressurized cylinder; warning	W029
Protect infant's eyes with opaque eye protection	M025
Protection shelter	E021
Quicksand or mud/deep mud or silt; warning	W061
Radioactive material or ionizing radiation; warning	W003
Rapid movement of workpiece in press brake; warning	W032
Refer to instruction manual/booklet	M002
Remote release station	F014

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Release falls in launch sequence	M042
Release lifeboat gripes in launch sequence	M045
Rescue boat	E037
Rescue window	E017
Rocket parachute flare	E049
Roof avalanche; warning	W040
Run over by remote operator-controlled machine; warning	W037
Safety shower	E012
Sand yachting; warning	W059
Search and rescue transponder	E047
Secure gas cylinders	M046
Sewage effluent outfall; warning	W055
Shallow water (diving); warning	W048
Sharks; warning	W054
Sharp element; warning	W022
Shipboard assembly station	E032
Shipboard general alarm	E031
Slippery surface; warning	W011
Slipway; warning	W044
Sound horn	M029
Start air supply in launch sequence	M044
Start engine in launch sequence	M038
Start water spray in launch sequence	M043
Stretcher	E013
Strong currents; warning	W057
Strong winds; warning	W064
Submerged objects; warning	W049
Sudden drop in swimming or leisure pools; warning	W050
Sudden loud noise; warning	W038
Surf craft area; warning	W046
Survival clothing	E056
Survival craft distress signals	E048
Thin ice; warning	W043
Towed water activity area; warning	W045
Toxic material; warning	W016
Tsunami evacuation area	E062
Tsunami evacuation building	E063
Tsunami hazard zone; warning	W056
Turn anticlockwise to open	E018
Turn clockwise to open	E019
Two-way VHF radiotelephone apparatus	E051
Unprotected edges; warning	W051
Unstable cliff; warning	W053
Unstable cliff edge; warning	W052

Table 1 (continued)

Referent (safety meaning)	Functional reference number
Use barrier cream	M022
Use footbridge	M023
Use gas detector	M048
Use handrail	M012
Use litter bin	M030
Use of smart glasses prohibited	P044
Use protective apron	M026
Use self-contained breathing appliance	M047
Use table saw adjustable guard	M031
Use this walkway	M024
Wash your hands	M011
Water fog applicator	F011
Water life-saving equipment	E061
Wear anti-static footwear	M032
Wear ear protection	M003
Wear eye protection	M004
Wear a face shield	M013
Wear head protection	M014
Wear high-visibility clothing	M015
Wear a mask	M016
Wear personal flotation devices	M053
Wear protective clothing	M010
Wear protective gloves	M009
Wear protective roller sport equipment	M049
Wear respiratory protection	M017
Wear safety belts	M020
Wear safety footwear	M008
Wear a safety harness	M018
Wear a welding mask	M019
Wheeled fire extinguisher	F009

### 4.3 Categorization of safety signs

Safety signs are categorized according to their function as follows:

- E is the category for signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs);
- F is the category for fire equipment signs;
- M is the category for mandatory action signs;
- P is the category for prohibition signs;
- W is the category for warning signs.

Table 2 summarizes the registered safety signs in terms of safety sign category in accordance with ISO 3864-1.

## 5 Registered safety signs

[Tables 3 to 7](#) give safety sign originals in a uniform 70 mm size with corner marks to enable accurate enlargement and reduction scaling. The sign illustrations are shown without borders in order to allow for consistent reproduction scaling, though a border can be useful to achieve a luminance contrast between the safety sign and its background when mounted or displayed. The safety signs should be reproduced exactly as shown in [Tables 3 to 7](#). However, some degree of graphical modification is permitted when cultural differences or special application formats need to be considered, provided the original meaning is retained and comprehension of the safety sign is maintained. Consistent reproduction and use of these safety signs will lead to a progressively improved degree of comprehension at the international level.

In cases where the orientation of the graphical symbol is not essential to the meaning of the safety sign, the graphical symbol may be reproduced in a mirrored form. For prohibition signs, it is essential that the prohibition bar does not obscure significant details of the graphical symbol.

NOTE The graphical symbol is the complete image containing all the graphical symbol elements as shown in the registered safety sign.

Where a registered safety sign is not available to indicate a particular desired meaning, the meaning shall be obtained either by developing a new safety sign following the design principles of ISO 3864-1 and ISO 3864-3 or by using the appropriate general sign (ISO 7010-M001, ISO 7010-P001, ISO 7010-W001), together with supplementary safety information.

[Tables 3 to 7](#) give a description of the application of each safety sign and present the safety sign originals according to their category as follows:

- E: signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs) see [Table 3](#);
- F: fire equipment signs see [Table 4](#);
- M: mandatory action signs see [Table 5](#);
- P: prohibition signs see [Table 6](#);
- W: warning signs see [Table 7](#).

Table 2 — Summary of all safety signs

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E001	F001	M001	P001	W001
Referent	Emergency exit (left hand)	Fire extinguisher	General mandatory action sign	General prohibition sign	General warning sign
Safety sign					
Reference number	E002	F002	M002	P002	W002
Referent	Emergency exit (right hand)	Fire hose reel	Refer to instruction manual/booklet	No smoking	Warning; Explosive material
Safety sign					
Reference number	E003	F003	M003	P003	W003
Referent	First aid	Fire ladder	Wear ear protection	No open flame; Fire, open ignition source and smoking prohibited	Warning; Radioactive material or ionizing radiation

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p><b>E004</b></p> <p>Emergency telephone</p>	 <p><b>F004</b></p> <p>Collection of firefighting equipment</p>	 <p><b>M004</b></p> <p>Wear eye protection</p>	 <p><b>P004</b></p> <p>No thoroughfare</p>	 <p><b>W004</b></p> <p>Warning; Laser beam</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	<p>withdrawn</p> <p><b>E005</b></p> <p>Direction, arrow (90° increments), safe condition</p>	 <p><b>F005</b></p> <p>Fire alarm call point</p>	 <p><b>M005</b></p> <p>Connect an earth terminal to the ground</p>	 <p><b>P005</b></p> <p>Not drinking water</p>	 <p><b>W005</b></p> <p>Warning; Non-ionizing radiation</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	<p>withdrawn</p> <p><b>E006</b></p> <p>Direction, 45° arrow (90° increments), safe condition</p>	 <p><b>F006</b></p> <p>Fire emergency telephone</p>	 <p><b>M006</b></p> <p>Disconnect mains plug from electrical outlet</p>	 <p><b>P006</b></p> <p>No access for forklift trucks and other industrial vehicles</p>	 <p><b>W006</b></p> <p>Warning; Magnetic field</p>

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E007	F007	M007	P007	W007
Referent	Evacuation assembly point	Fire protection door	Opaque eye protection must be worn	No access for people with active implanted cardiac devices	Warning; Floor-level obstacle
Safety sign					
Reference number	E008	F008	M008	P008	W008
Referent	Break to obtain access	Fixed fire extinguishing battery	Wear safety footwear	No metallic articles or watches	Warning; Drop (fall)
Safety sign					
Reference number	E009	F009	M009	P009	W009
Referent	Doctor	Wheeled fire extinguisher	Wear protective gloves	No climbing	Warning; Biological hazard
Safety sign					
Reference number	E010	F010	M010	P010	W010
Referent	Automated external heart defibrillator	Portable foam applicator unit	Wear protective clothing	Do not touch	Warning; Low temperature/freezing conditions

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E011</p> <p>Eyewash station</p>	 <p>F011</p> <p>Water fog applicator</p>	 <p>M011</p> <p>Wash your hands</p>	 <p>P011</p> <p>Do not extinguish with water</p>	 <p>W011</p> <p>Warning; Slippery surface</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E012</p> <p>Safety shower</p>	 <p>F012</p> <p>Fixed fire extinguishing installation</p>	 <p>M012</p> <p>Use handrail</p>	 <p>P012</p> <p>No heavy load</p>	 <p>W012</p> <p>Warning; Electricity</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E013</p> <p>Stretcher</p>	 <p>F013</p> <p>Fixed fire extinguishing bottle</p>	 <p>M013</p> <p>Wear a face shield</p>	 <p>P013</p> <p>No activated mobile phones</p>	 <p>W013</p> <p>Warning; Guard dog</p>
<p>Safety sign</p> <p>Reference number</p> <p>Referent</p>	 <p>E014</p> <p>Child seat presence and orientation detection system (CPOD)</p>	 <p>F014</p> <p>Remote release station</p>	 <p>M014</p> <p>Wear head protection</p>	 <p>P014</p> <p>No access for people with metallic implants</p>	 <p>W014</p> <p>Warning; Forklift trucks and other industrial vehicles</p>

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign					
Reference number	E015	F015	M015	P015	W015
Referent	Drinking water	Fire monitor	Wear high-visibility clothing	No reaching in	Warning; Overhead load
Safety sign					
Reference number	E016	F016	M016	P016	W016
Referent	Emergency window with escape ladder	Fire blanket	Wear a mask	Do not spray with water	Warning; Toxic material
Safety sign		—			
Reference number	E017	—	M017	P017	W017
Referent	Rescue window	—	Wear respiratory protection	No pushing	Warning; Hot surface
Safety sign		—			
Reference number	E018	—	M018	P018	W018
Referent	Turn anticlockwise to open	—	Wear a safety harness	No sitting	Warning; Automatic start-up

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E019	—	M019	P019	W019
Referent	Turn clockwise to open	—	Wear a welding mask	No stepping on surface	Warning; Crushing
Safety sign		—			
Reference number	E020	—	M020	P020	W020
Referent	Emergency stop button	—	Wear safety belts	Do not use lift in the event of fire	Warning; Overhead obstacle
Safety sign		—			
Reference number	E021	—	M021	P021	W021
Referent	Protection shelter	—	Disconnect before carrying out maintenance or repair	No dogs	Warning; Flammable material
Safety sign		—			
Reference number	E022	—	M022	P022	W022
Referent	Door opens by pushing on the left-hand side	—	Use barrier cream	No eating or drinking	Warning; Sharp element

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E023	—	M023	P023	W023
Referent	Door opens by pushing on the right-hand side	—	Use footbridge	Do not obstruct	Warning; Corrosive substance
Safety sign		—			
Reference number	E024	—	M024	P024	W024
Referent	Evacuation temporary refuge	—	Use this walkway	Do not walk or stand here	Warning; Crushing of hands
Safety sign		—			
Reference number	E025	—	M025	P025	W025
Referent	Emergency hammer	—	Protect infant's eyes with opaque eye protection	Do not use this incomplete scaffold	Warning; Counterrotating rollers
Safety sign		—			
Reference number	E026	—	M026	P026	W026
Referent	Emergency exit for people unable to walk or with walking impairment (left)	—	Use protective apron	Do not use this device in a bathtub, shower, or water-filled reservoir	Warning; Battery charging

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<b>Safety sign</b>  <b>Reference number</b> <b>Referent</b>	 <b>E027</b> Medical grab bag	—	 <b>M027</b> Check guard	 <b>P027</b> Do not use this lift for people	 <b>W027</b> Warning; Optical radiation
<b>Safety sign</b>  <b>Reference number</b> <b>Referent</b>	 <b>E028</b> Oxygen resuscitator	—	 <b>M028</b> Keep locked	 <b>P028</b> Do not wear gloves	 <b>W028</b> Warning; Oxidizing substance
<b>Safety sign</b>  <b>Reference number</b> <b>Referent</b>	 <b>E029</b> Emergency escape breathing device	—	 <b>M029</b> Sound horn	 <b>P029</b> No photography	 <b>W029</b> Warning; Pressurized cylinder

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E030	—	M030	P030	W030
Referent	Emergency exit for people unable to walk or with walking impairment (right)	—	Use litter bin	Do not tie knots in rope	Warning; Hand crushing between press brake tool
Safety sign		—			
Reference number	E031	—	M031	P031	W031
Referent	Shipboard general alarm	—	Use table saw adjustable guard	Do not alter the state of the switch	Warning; Hand crushing between press brake and material
Safety sign		—			
Reference number	E032	—	M032	P032	W032
Referent	Shipboard assembly station	—	Wear anti-static footwear	Do not use for face grinding	Warning; Rapid movement of workpiece in press brake

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E033 Door slides right to open</p>	—	—	 <p>M033 Close safety bar of chairlift</p>	 <p>P033 Do not use for wet grinding</p>	 <p>W033 Warning; Barbed wire</p>
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E034 Door slides left to open</p>	—	—	 <p>M034 Open safety bar of chairlift</p>	 <p>P034 Do not use with hand-held grinding machine</p>	 <p>W034 Warning; Bull</p>
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E035 Liferaft knife</p>	—	—	 <p>M035 Immediately leave the tow-track in the event of falling</p>	 <p>P035 Do not wear metal-studded footwear</p>	 <p>W035 Warning; Falling objects</p>
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E036 Lifeboat</p>	—	—	 <p>M036 Lift ski tips</p>	 <p>P036 No children allowed</p>	 <p>W036 Warning; Fragile roof</p>

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E037	—	M037	P037	W037
Referent	Rescue boat	—	Close and secure hatches in launch sequence	Do not leave the tow-track	Warning; Run over by remote operator-controlled machine
Safety sign		—			
Reference number	E038	—	M038	P038	W038
Referent	Liferaft	—	Start engine in launch sequence	Do not swing the chair	Warning; Sudden loud noise
Safety sign		—			
Reference number	E039	—	M039	P039	W039
Referent	Davit-launched liferaft	—	Lower lifeboat to the water in launch sequence	Hot works prohibited	Warning; Falling ice
Safety sign		—			
Reference number	E040	—	M040	P040	W040
Referent	Lifebuoy	—	Lower liferaft to the water in launch sequence	Do not set off fireworks	Warning; Roof avalanche

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E041 Lifebuoy with line</p>	—	—	 <p>M041 Lower rescue boat to the water in launch sequence</p>	 <p>P041 No leaning against</p>	 <p>W041 Warning; Asphyxiating atmosphere</p>
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E042 Lifebuoy with light</p>	—	 <p>M042 Release falls in launch sequence</p>	 <p>P042 Not for pregnant women</p>	 <p>W042 Warning; Arc flash</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E043 Lifebuoy with line and light</p>	—	 <p>M043 Start water spray in launch sequence</p>	 <p>P043 Not for people in the state of intoxication</p>	 <p>W043 Warning; Thin ice</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E044 Lifejacket</p>	—	 <p>M044 Start air supply in launch sequence</p>	 <p>P044 Use of smart glasses prohibited</p>	 <p>W044 Warning; Slipway</p>	

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—		—	
Reference number	E045	—	M045	—	W045
Referent	Child's lifejacket	—	Release lifeboat grips in launch sequence	—	Warning; Towed water activity area
Safety sign		—			
Reference number	E046	—	M046	P046	W046
Referent	Infant's lifejacket	—	Secure gas cylinders	Do not stretch out of toboggan	Warning; Surf craft area
Safety sign		—			
Reference number	E047	—	M047	P047	W047
Referent	Search and rescue transponder	—	Use self-contained breathing appliance	Do not ram into toboggan	Warning; Deep water
Safety sign		—			
Reference number	E048	—	M048	P048	W048
Referent	Survival craft distress signals	—	Use gas detector	No running	Warning; Shallow water (diving)

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E049 Rocket parachute flare</p>	— — —	 <p>M049 Wear protective roller sport equipment</p>	 <p>P049 No swimming</p>	 <p>W049 Warning; Submerged objects</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E050 Line-throwing appliance</p>	— — —	 <p>M050 Alighting from toboggan to the left</p>	 <p>P050 No snorkelling</p>	 <p>W050 Warning; Sudden drop in swimming or leisure pools</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E051 Two-way VHF radiotelephone apparatus</p>	— — —	 <p>M051 Alighting from toboggan to the right</p>	 <p>P051 No sub-aqua diving</p>	 <p>W051 Warning; Unprotected edges</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E052 Emergency position indicating radio beacon</p>	— — —	 <p>M052 Keep distance between toboggans</p>	 <p>P052 No diving</p>	 <p>W052 Warning; Unstable cliff edge</p>	

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—			
Reference number	E053	—	M053	P053	W053
Referent	Embarkation ladder	—	Wear personal flotation devices	No sailing	Warning; Unstable cliff
Safety sign		—			
Reference number	E054	—	M054	P054	W054
Referent	Marine evacuation slide	—	Keep children under supervision in the aquatic environment	No windsurfing	Warning; Sharks
Safety sign		—	—		
Reference number	E055	—	—	P055	W055
Referent	Marine evacuation chute	—	—	No manually powered craft	Warning; Sewage effluent outfall
Safety sign		—	—		
Reference number	E056	—	—	P056	W056
Referent	Survival clothing	—	—	No mechanically powered craft	Warning; Tsunami hazard zone

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E057 Door opens by pulling on the left-hand side</p>	—	—	 <p>P057 No personal water craft</p>	 <p>W057 Warning; Strong currents</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E058 Door opens by pulling on the right-hand side</p>	—	—	 <p>P058 No towed water activity</p>	 <p>W058 Warning; Boating area</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E059 Escape ladder</p>	—	—	 <p>P059 No surf craft</p>	 <p>W059 Warning; Sand yachting</p>	
<p>Safety sign</p>  <p>Reference number Referent</p> <p>E060 Evacuation chair</p>	—	—	 <p>P060 No outdoor footwear</p>	 <p>W060 Warning; Incoming tides</p>	

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign		—	—		
Reference number	E061	—	—	P061	W061
Referent	Water life-saving equipment	—	—	No jumping into water	Warning; Quicksand or mud/deep mud or silt
Safety sign		—	—		
Reference number	E062	—	—	P062	W062
Referent	Tsunami evacuation area	—	—	No pushing into water	Warning; Kite surfing
Safety sign		—	—		
Reference number	E063	—	—	P063	W063
Referent	Tsunami evacuation building	—	—	No body boarding	Warning; Parasailing
Safety sign	—	—	—		
Reference number	—	—	—	P064	W064
Referent	—	—	—	No surfing between the red-and-yellow flags	Warning; Strong winds

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign	—	—	—		
Reference number	—	—	—	P065	W065
Referent	—	—	—	No kite surfing	Warning; High surf or large breaking waves
Safety sign	—	—	—		
Reference number	—	—	—	P066	W066
Referent	—	—	—	No parasailing	Warning; Deep shelving beach
Safety sign	—	—	—		
Reference number	—	—	—	P067	W067
Referent	—	—	—	No sand yachting	Warning; Crocodiles, alligators or caymans
Safety sign	—	—	—		—
Reference number	—	—	—	P068	—
Referent	—	—	—	Do not expose to direct sunlight or hot surface	—

Table 2 (continued)

	Category				
	E	F	M	P	W
	Evacuation route, location of safety equipment or safety facility, safety action (safe condition signs)	Fire equipment signs	Mandatory action signs	Prohibition signs	Warning signs
Safety sign	—	—	—		—
Reference number	—	—	—	P069	—
Referent	—	—	—	Not to be serviced by users	—
Safety sign	—	—	—		—
Reference number	—	—	—	P070	—
Referent	—	—	—	Do not put finger into the nozzle of a hydromassage	—

**Table 3 — Description and application of referent for signs indicating an evacuation route, the location of safety equipment or a safety facility, or a safety action (safe condition signs) (category E)**

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E001</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Emergency exit (left hand)</b></p>
	<b>Function</b> <p>To indicate an escape route to a place of safety</p>
	<b>Image content</b> <p>Human figure moving (to the left) through doorway</p>
<b>Hazard</b> <p>Not being able to locate an escape route to a place of safety which is provided for evacuation</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of an escape route to a place of safety</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. However, this safety sign has been the subject of extensive research in Japan and the design selected has received the best comprehension results. A supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information (direction examples, the arrows may be rotated in increments of 45°):</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p>See ISO 16069:2017, Figure 1 for examples and meanings of combinations of the exit sign with the supplementary arrow sign.</p>	

Table 3 (continued)

	<b>Reference No.</b> ISO 7010-E002
	<b>Referent</b> Emergency exit (right hand)
	<b>Function</b> To indicate an escape route to a place of safety
	<b>Image content</b> Human figure moving (to the right) through doorway
<b>Hazard</b> Not being able to locate an escape route to a place of safety which is provided for evacuation	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of an escape route to a place of safety	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. However, this safety sign has been the subject of extensive research in Japan and the design selected has received the best comprehension results. A supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information (direction examples, the arrows may be rotated in increments of 45°):	
	
See ISO 16069:2017, Figure 1 for examples and meanings of combinations of the exit sign with the supplementary arrow sign.	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E003</p>
	<b>Referent</b> <p style="text-align: center;">First aid</p>
	<b>Function</b> To indicate the location of first aid equipment or facilities or staff
	<b>Image content</b> First aid cross
<b>Hazard</b> Not being able to locate first aid equipment or facilities or staff	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of first aid equipment or facilities or staff	
<b>Additional information</b> This safety sign should be used for first aid equipment or facilities or staff for which/whom there is no registered safety sign. The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E004</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Emergency telephone</b></p>
	<p><b>Function</b></p> <p>To indicate the location of an emergency telephone</p>
	<p><b>Image content</b></p> <p>Telephone receiver (profile), first aid cross</p>
<p><b>Hazard</b></p> <p>Not being able to locate an emergency telephone</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an emergency telephone</p>	
<p><b>Additional information</b></p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

<b>withdrawn</b>	<b>Reference No.</b> ISO 7010-E005
	<b>Referent</b> Direction, arrow (90° increments), safe condition
	<b>Function</b>
	<b>Image content</b>
<p><b>Hazard</b></p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p><b>Additional information</b> This sign has been withdrawn as a registered safety sign, since it is to be used as a supplementary sign only.</p>	

Table 3 (continued)

<b>withdrawn</b>	<b>Reference No.</b>  ISO 7010-E006
	<b>Referent</b> Direction, 45° arrow (90° increments), safe condition
	<b>Function</b>
	<b>Image content</b>
<p><b>Hazard</b></p> <p>Human behaviour that is intended to be caused after understanding the safety sign's meaning</p> <p><b>Additional information</b></p> <p>This sign has been withdrawn as a registered safety sign, since it is to be used as a supplementary sign only.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E007</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Evacuation assembly point</b></p>
	<b>Function</b> <p>To indicate the location of a safe assembly point following evacuation</p>
	<b>Image content</b> <p>Two human figures and a head of a third figure in a group, four arrows coming from the corners pointing to them</p>
<b>Hazard</b> <p>Not being able to locate a safe assembly point following evacuation</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the evacuation assembly point which is provided to enable people to be accounted for following the evacuation of a building or premises</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E008</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Break to obtain access</b></p>
	<p><b>Function</b></p> <p>To indicate a cover which requires breaking to obtain access to an emergency exit device</p>
	<p><b>Image content</b></p> <p>Human fist and lower arm (outlined) holding a bar, uneven star shape</p>
<p><b>Hazard</b></p> <p>Not being able to open an emergency exit device</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Breaking the cover to gain access to the device that operates an emergency exit</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E009</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Doctor</b></p>
	<b>Function</b> <p>To indicate the location of a doctor for emergencies</p>
	<b>Image content</b> <p>Upper human figure with stethoscope, first aid cross</p>
<b>Hazard</b> <p>Not being able to locate an emergency doctor</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of an emergency doctor</p>	
<b>Additional information</b> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

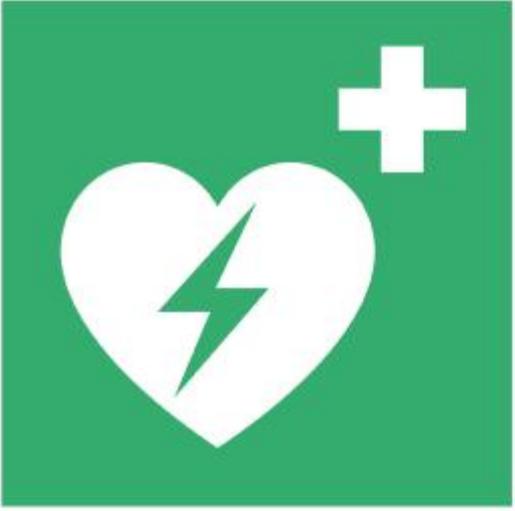
	<p><b>Reference No.</b></p> <p>ISO 7010-E010</p>
	<p><b>Referent</b></p> <p>Automated external heart defibrillator</p>
	<p><b>Function</b></p> <p>To indicate the location of an automated external heart defibrillator</p>
	<p><b>Image content</b></p> <p>Heart with lightning bolt in the middle, first aid cross</p>
<p><b>Hazard</b></p> <p>Not being able to locate an automated external heart defibrillator</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an automated external heart defibrillator</p> <p><b>Additional information</b></p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E011</p>
	<b>Referent</b> <p style="text-align: center;">Eyewash station</p>
	<b>Function</b> <p>To indicate the location of an eyewash station</p>
	<b>Image content</b> <p>Eye above running water coming out of a shower head, first aid cross</p>
<b>Hazard</b> <p>Not being able to locate an eyewash station</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of an eyewash station</p>	
<b>Additional information</b> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

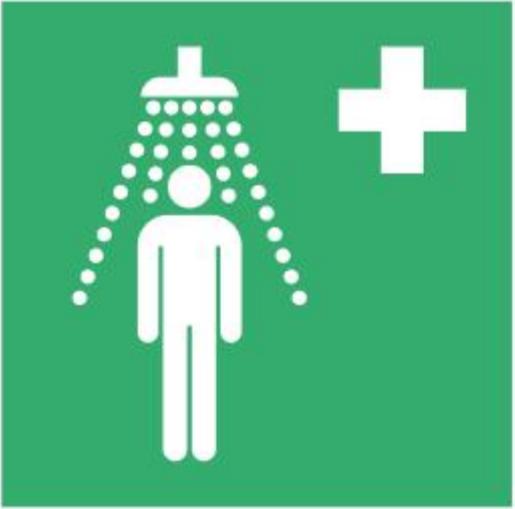
	<p><b>Reference No.</b></p> <p>ISO 7010-E012</p>
	<p><b>Referent</b></p> <p>Safety shower</p>
	<p><b>Function</b></p> <p>To indicate the location of a safety shower</p>
	<p><b>Image content</b></p> <p>Human figure under running water coming out of a shower head, first aid cross</p>
<p><b>Hazard</b></p> <p>Not being able to locate a safety shower</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a safety shower</p> <p><b>Additional information</b></p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> ISO 7010-E013
	<b>Referent</b> Stretcher
	<b>Function</b> To indicate the location of a stretcher
	<b>Image content</b> Human figure on a stretcher, first aid cross
<b>Hazard</b> Not being able to locate a stretcher	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a stretcher	
<b>Additional information</b> The first aid cross may be replaced with another element appropriate to cultural requirements of the target group. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E014</p>
	<p><b>Referent</b></p> <p>Child seat presence and orientation detection system (CPOD)</p>
	<p><b>Function</b></p> <p>To indicate that a CPOD-equipped child seat can safely be used on a CPOD-equipped passenger seat protected by a frontal airbag</p>
	<p><b>Image content</b></p> <p>Vehicle passenger seat, child in rear-facing child seat, dot, three curved lines of increasing size radiating from the dot, filled semi-circle</p>
<p><b>Hazard</b></p> <p>Without a CPOD system, a fully powered vehicle airbag can injure a child in a child seat when the airbag is deployed</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Installing a CPOD-equipped child seat on a passenger seat protected by a frontal airbag in a vehicle that recognizes the CPOD child seat</p> <p><b>Additional information</b></p> <p>This safety sign will be used along with a supplementary sign as part of a label for CPOD-equipped child seats or for vehicles equipped with the CPOD sensing system. These two signs are part of ISO/TS 22239-3.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E015</p>
	<b>Referent</b> <p style="text-align: center;">Drinking water</p>
	<b>Function</b> To indicate the location of drinking water
	<b>Image content</b> Tap above glass, two wavy lines
<b>Hazard</b> Not being able to locate drinking water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a water supply that is suitable for drinking	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E016</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Emergency window with escape ladder</b></p>
	<p><b>Function</b></p> <p>To indicate the location of an emergency window for escape with a permanently fixed escape ladder</p>
	<p><b>Image content</b></p> <p>Human figure, window and a ladder on the left</p>
<p><b>Hazard</b></p> <p>Not being able to locate an emergency window for escape</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an emergency window</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E017</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Rescue window</b></p>
	<b>Function</b> <p>To indicate the location of a rescue window where people can be rescued by a ladder by intervention forces</p>
	<b>Image content</b> <p>Human figure, window, firefighting vehicle with ladder</p>
<b>Hazard</b> <p>Not being able to locate a rescue window to be rescued by intervention forces</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of a rescue window</p>	
<b>Additional information</b> <p>This safety sign shall be placed inside the building.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E018</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Turn anticlockwise to open</b></p>
	<p><b>Function</b></p> <p>To signify that the doorknob of a security door on an escape route must be turned in an anticlockwise direction in order for the opening device to operate</p>
	<p><b>Image content</b></p> <p>Doorknob with semicircular anticlockwise arrow</p>
<p><b>Hazard</b></p> <p>Being unable to open a door on an escape route which has a security lock and an emergency opening device</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Turning the doorknob in an anticlockwise direction in order to open a door on an escape route which has a security lock</p> <p><b>Additional information</b></p> <p>This safety sign is intended to be used only on doors with a security locking mechanism.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E019</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Turn clockwise to open</b></p>
	<b>Function</b> <p>To signify that the doorknob of a security door on an escape route must be turned in a clockwise direction in order for the opening device to operate</p>
	<b>Image content</b> <p>Doorknob with semicircular clockwise arrow</p>
<b>Hazard</b> <p>Being unable to open a door on an escape route which has a security lock and an emergency opening device</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Turning the doorknob in a clockwise direction in order to open a door on an escape route which has a security lock</p>	
<b>Additional information</b> <p>This safety sign is intended to be used only on doors with a security locking mechanism.          Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E020</p>
	<p><b>Referent</b></p> <p>Emergency stop button</p>
	<p><b>Function</b></p> <p>To indicate the location of an emergency stop button</p>
	<p><b>Image content</b></p> <p>Hand over button shape, two lines</p>
<p><b>Hazard</b></p> <p>Not being able to locate an emergency stop button</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an emergency stop button</p> <p><b>Additional information</b></p> <p>The actuator of the emergency stop device itself is likely to be coloured red (see e.g. ISO 13850, IEC 60601-1).</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E021</p>
	<b>Referent</b> <p style="text-align: center;">Protection shelter</p>
	<b>Function</b> To indicate the location of a protection shelter
	<b>Image content</b> Four human figures within an irregular hexagon, line and shield
<b>Hazard</b> Not being able to locate a protection shelter	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a protection shelter	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

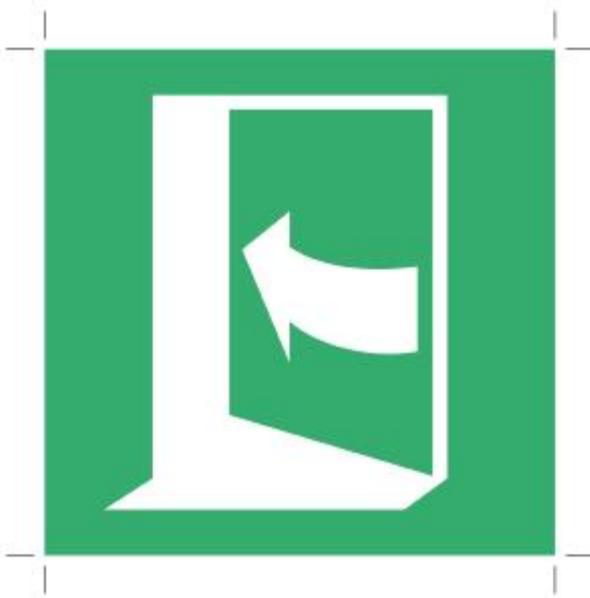
	<p><b>Reference No.</b></p> <p>ISO 7010-E022</p>
	<p><b>Referent</b></p> <p>Door opens by pushing on the left-hand side</p>
	<p><b>Function</b></p> <p>To indicate that the door opens by pushing on the left-hand side</p>
	<p><b>Image content</b></p> <p>Doorway with door opening outwards, curved arrow pointing to the left</p>
<p><b>Hazard</b></p> <p>Not being able to open the door</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware that the door opens by pushing on the left-hand side</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E023</p>
	<b>Referent</b> <b>Door opens by pushing on the right-hand side</b>
	<b>Function</b> To indicate that the door opens by pushing on the right-hand side
	<b>Image content</b> Doorway with door opening outwards, curved arrow pointing to the right
<b>Hazard</b> Not being able to open the door	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware that the door opens by pushing on the right-hand side	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E024</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Evacuation temporary refuge</b></p>
	<p><b>Function</b></p> <p>To indicate the location of a temporary safe area (refuge) to await rescue assistance, provided for those unable to use stairs in the event of an evacuation</p>
	<p><b>Image content</b></p> <p>Human figure in wheelchair (right-hand profile), four white arrows coming from the corners pointing to it</p>
<p><b>Hazard</b></p> <p>Not being able to locate an area provided for temporary waiting for rescue assistance for those unable to use stairs in the event of an evacuation</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an area provided for temporary waiting for rescue assistance for those unable to use stairs in the event of an evacuation</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E025</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Emergency hammer</b></p>
	<p><b>Function</b></p> <p>To indicate the location of an emergency hammer</p>
	<p><b>Image content</b></p> <p>Emergency hammer with glass cracked around the point of the hammer</p>
<p><b>Hazard</b></p> <p>Not being able to locate an emergency hammer</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an emergency hammer</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available.</p> <p>Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E026</p>
	<p><b>Referent</b></p> <p>Emergency exit for people unable to walk or with walking impairment (left)</p>
	<p><b>Function</b></p> <p>To indicate an escape route to a place of safety usable by people unable to walk or with walking impairment</p>
	<p><b>Image content</b></p> <p>Human figure in wheelchair (left-hand profile), which drives through a door frame (left)</p>
<p><b>Hazard</b></p> <p>Not being able to locate an escape route to a place of safety, which is usable for the evacuation of people unable to walk or with walking impairment</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an escape route to a place of safety, which can be used by people unable to walk or with walking impairment</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available.</p> <p>Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information.</p> <p>This safety sign shall be accompanied by ISO 7010-E001 or ISO 7010-E002.</p>	

Table 3 (continued)

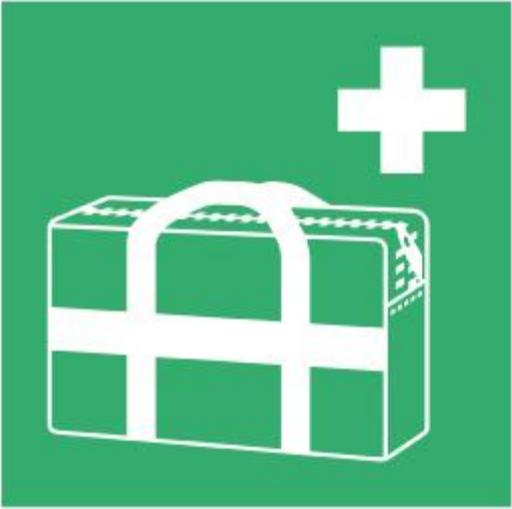
	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E027</p>
	<b>Referent</b> <p style="text-align: center;">Medical grab bag</p>
	<b>Function</b> <p>To indicate the location of a medical grab bag</p>
	<b>Image content</b> <p>Bag (outlined) with handles, first aid cross</p>
<b>Hazard</b> <p>Not being able to locate a medical grab bag</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of a medical grab bag</p>	
<b>Additional information</b> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

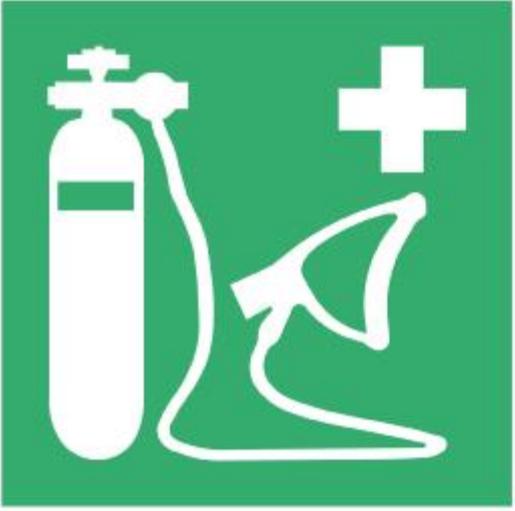
	<p><b>Reference No.</b></p> <p>ISO 7010-E028</p>
	<p><b>Referent</b></p> <p>Oxygen resuscitator</p>
	<p><b>Function</b></p> <p>To indicate the location of an oxygen resuscitator</p>
	<p><b>Image content</b></p> <p>Oxygen cylinder with manual control, hose line and mask, first aid cross</p>
<p><b>Hazard</b></p> <p>Not being able to locate an oxygen resuscitator</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an oxygen resuscitator</p>	
<p><b>Additional information</b></p> <p>The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E029</p>
	<b>Referent</b> <p style="text-align: center;">Emergency escape breathing device</p>
	<b>Function</b> <p>To indicate the location of an emergency escape breathing device (EEBD)</p>
	<b>Image content</b> <p>Full-face mask with regulator (front view), first aid cross</p>
<p><b>Hazard</b>  Not being able to locate an EEBD</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b>  Being aware of the location of an EEBD</p> <p><b>Additional information</b>  The first aid cross may be replaced with another element appropriate to cultural requirements of the target group.  Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E030</p>
	<p><b>Referent</b></p> <p>Emergency exit for people unable to walk or with walking impairment (right)</p>
	<p><b>Function</b></p> <p>To indicate an escape route to a place of safety usable by people unable to walk or with walking impairment</p>
	<p><b>Image content</b></p> <p>Human figure in wheelchair (right-hand profile), which drives through a door frame (right)</p>
<p><b>Hazard</b></p> <p>Not being able to locate an escape route to a place of safety, which is usable for the evacuation of people unable to walk or with walking impairment</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an escape route to a place of safety, which can be used by people unable to walk or with walking impairment</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>Supplementary arrow sign (type D of ISO 3864-3:2012) in white on green to be used to give directional information.</p> <p>This safety sign shall be accompanied by ISO 7010-E001 or ISO 7010-E002.</p>	

Table 3 (continued)

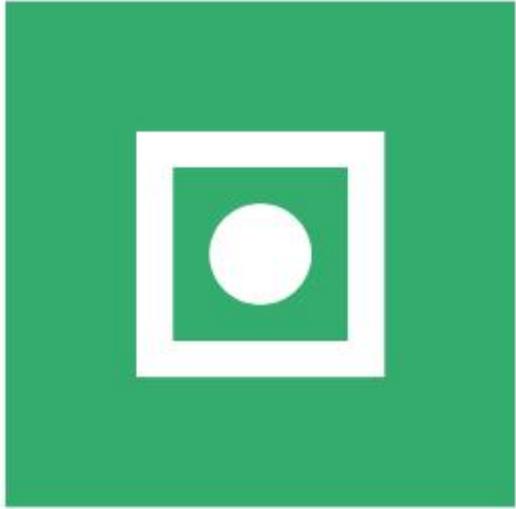
	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E031</p>
	<b>Referent</b> <p style="text-align: center;">Shipboard general alarm</p>
	<b>Function</b> To indicate the location of a general alarm button on board ship
	<b>Image content</b> Circle in a square (outlined)
<b>Hazard</b> Not being able to locate a general alarm button on board ship	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Crew being aware of the location of a general alarm button	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E032</p>
	<p><b>Referent</b></p> <p>Shipboard assembly station</p>
	<p><b>Function</b></p> <p>To indicate the location of an assembly station on board ship</p>
	<p><b>Image content</b></p> <p>Five human figures in different sizes standing on a square, four arrows coming from the corners pointing to them</p>
<p><b>Hazard</b></p> <p>Not being able to locate an assembly station on board ship</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an assembly station on board ship</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

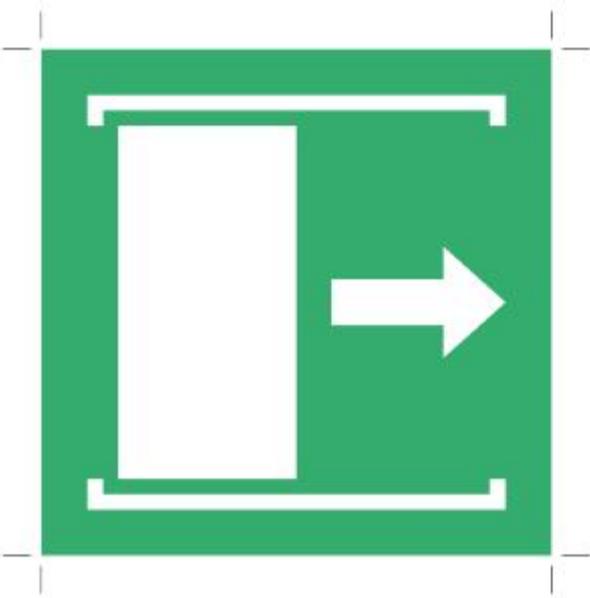
	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E033</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Door slides right to open</b></p>
	<p><b>Function</b></p> <p>To indicate the direction in which a sliding door opens</p>
	<p><b>Image content</b></p> <p>Rectangle bordered top and bottom, arrow pointing to the right</p>
<p><b>Hazard</b></p> <p>Not being able to determine the direction of movement of a sliding door</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being able to discern a sliding door which opens to the right</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

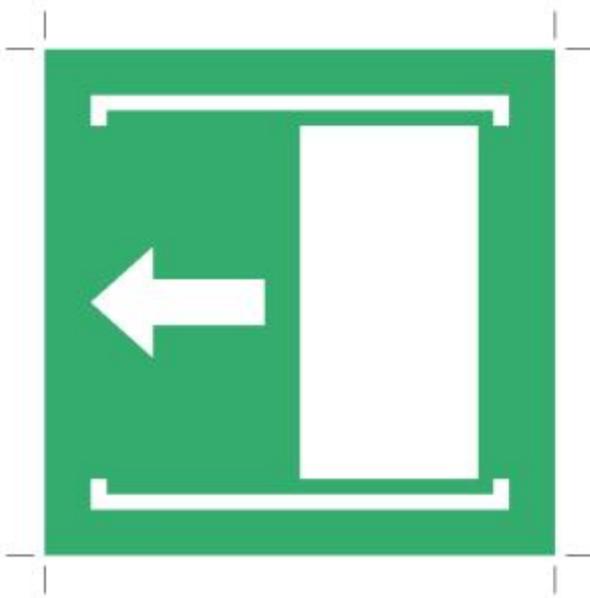
	<p><b>Reference No.</b></p> <p>ISO 7010-E034</p>
	<p><b>Referent</b></p> <p>Door slides left to open</p>
	<p><b>Function</b></p> <p>To indicate the direction in which a sliding door opens</p>
	<p><b>Image content</b></p> <p>Rectangle bordered top and bottom, arrow pointing to the left</p>
<p><b>Hazard</b></p> <p>Not being able to determine the direction of movement of a sliding door</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being able to discern a sliding door which opens to the left</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E035</p>
	<b>Referent</b> <p style="text-align: center;">Liferaft knife</p>
	<b>Function</b> To indicate the location of a liferaft knife
	<b>Image content</b> Liferaft knife (with rounded tip and drilled-out holes in blade) between sliced braided rope
<b>Hazard</b> Not being able to locate a liferaft knife	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a liferaft knife	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

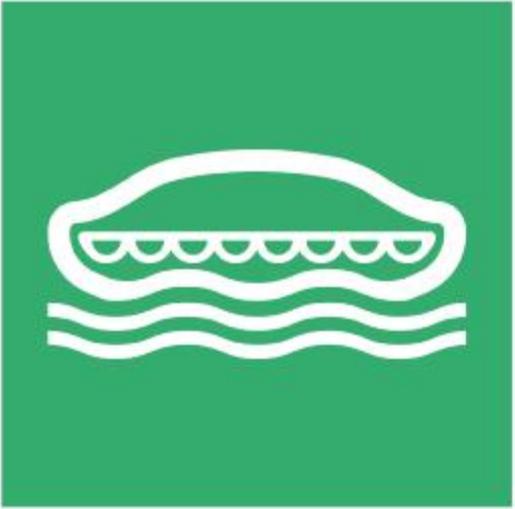
	<p><b>Reference No.</b></p> <p>ISO 7010-E036</p>
	<p><b>Referent</b></p> <p>Lifeboat</p>
	<p><b>Function</b></p> <p>To indicate the location of a lifeboat</p>
	<p><b>Image content</b></p> <p>Lifeboat, two wavy lines</p>
<p><b>Hazard</b></p> <p>Not being able to locate a lifeboat</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a lifeboat</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E037</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Rescue boat</b></p>
	<b>Function</b> To indicate the location of a rescue boat
	<b>Image content</b> Boat, two upper human figures, one of them outlined, two wavy lines
<b>Hazard</b> Not being able to locate a rescue boat	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a rescue boat	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E038</p>
	<p><b>Referent</b></p> <p>Liferaft</p>
	<p><b>Function</b></p> <p>To indicate the location of a liferaft</p>
	<p><b>Image content</b></p> <p>Liferaft, two wavy lines</p>
<p><b>Hazard</b></p> <p>Not being able to locate a liferaft</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a liferaft</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E039</p>
	<p><b>Referent</b></p> <p>Davit-launched liferaft</p>
	<p><b>Function</b></p> <p>To indicate the location of a davit-launched liferaft</p>
	<p><b>Image content</b></p> <p>Liferaft suspended from single point davit</p>
<p><b>Hazard</b></p> <p>Not being able to locate a davit-launched liferaft</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a davit-launched liferaft</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E040</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Lifebuoy</b></p>
	<b>Function</b> To indicate the location of a lifebuoy
	<b>Image content</b> Ring buoy with four becketed lines
<b>Hazard</b> Not being able to locate a lifebuoy	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a lifebuoy	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E041</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Lifebuoy with line</b></p>
	<b>Function</b> <p>To indicate the location of a lifebuoy with line</p>
	<b>Image content</b> <p>Ring buoy with four becketed lines and attached segmented line</p>
<b>Hazard</b> <p>Not being able to locate a lifebuoy with line</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of a lifebuoy with line</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E042</p>
	<p><b>Referent</b></p> <p>Lifebuoy with light</p>
	<p><b>Function</b></p> <p>To indicate the location of a lifebuoy with light</p>
	<p><b>Image content</b></p> <p>Ring buoy with four becketed lines and attached light</p>
<p><b>Hazard</b></p> <p>Not being able to locate a lifebuoy with light</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a lifebuoy with light</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E043</p>
	<b>Referent</b> <p style="text-align: center;"><b>Lifebuoy with line and light</b></p>
	<b>Function</b> To indicate the location of a lifebuoy with line and light
	<b>Image content</b> Ring buoy with four becketed lines and attached segmented line and light
<b>Hazard</b> Not being able to locate a lifebuoy with line and light	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a lifebuoy with line and light	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<b>Reference No.</b> ISO 7010-E044
	<b>Referent</b> Lifejacket
	<b>Function</b> To indicate the location of a lifejacket
	<b>Image content</b> Lifejacket
<b>Hazard</b> Not being able to locate a lifejacket	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a lifejacket	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E045</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Child's lifejacket</b></p>
	<b>Function</b> <p>To indicate the location of a child's lifejacket</p>
	<b>Image content</b> <p>Lifejacket with walking child on one lobe</p>
<b>Hazard</b> <p>Not being able to locate a child's lifejacket</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of a child's lifejacket</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E046</p>
	<p><b>Referent</b></p> <p>Infant's lifejacket</p>
	<p><b>Function</b></p> <p>To indicate the location of an infant's lifejacket</p>
	<p><b>Image content</b></p> <p>Lifejacket with infant in diaper on one lobe</p>
<p><b>Hazard</b></p> <p>Not being able to locate an infant's lifejacket</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an infant's lifejacket</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;">ISO 7010-E047</p>
	<p><b>Referent</b></p> <p style="text-align: center;">Search and rescue transponder</p>
	<p><b>Function</b></p> <p>To indicate the location of a search and rescue transponder (SART)</p>
	<p><b>Image content</b></p> <p>Transponder with arrow pointing towards antenna and an arrow pointing away</p>
<p><b>Hazard</b></p> <p>Not being able to locate a SART</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a SART</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E048</p>
	<p><b>Referent</b></p> <p>Survival craft distress signal</p>
	<p><b>Function</b></p> <p>To indicate the location of a survival craft distress signal</p>
	<p><b>Image content</b></p> <p>Bursting star at the end of a curved path of diminishing width</p>
<p><b>Hazard</b></p> <p>Not being able to locate a survival craft distress signal</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a survival craft distress signal</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E049</p>
	<b>Referent</b> <p style="text-align: center;">Rocket parachute flare</p>
	<b>Function</b> To indicate the location of a rocket parachute flare
	<b>Image content</b> Bursting star suspended from a parachute
<b>Hazard</b> Not being able to locate a rocket parachute flare	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a rocket parachute flare	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E050</p>
	<p><b>Referent</b></p> <p>Line-throwing appliance</p>
	<p><b>Function</b></p> <p>To indicate the location of a line-throwing appliance</p>
	<p><b>Image content</b></p> <p>Barrel-mounted rocket with attached segmented line</p>
<p><b>Hazard</b></p> <p>Not being able to locate a line-throwing appliance</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a line-throwing appliance</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E051</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Two-way VHF radiotelephone apparatus</b></p>
	<p><b>Function</b></p> <p>To indicate the location of a two-way VHF radiotelephone apparatus</p>
	<p><b>Image content</b></p> <p>Hand holding radiotelephone with three-prong antenna, three curved lines on each side</p>
<p><b>Hazard</b></p> <p>Not being able to locate a two-way VHF radiotelephone apparatus</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a two-way VHF radiotelephone apparatus</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E052</p>
	<p><b>Referent</b></p> <p>Emergency position indicating radio beacon</p>
	<p><b>Function</b></p> <p>To indicate the location of an emergency position indicating radio beacon (EPIRB)</p>
	<p><b>Image content</b></p> <p>Radio beacon with three-prong antenna, three curved lines on each side</p>
<p><b>Hazard</b></p> <p>Not being able to locate an EPIRB</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an EPIRB</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

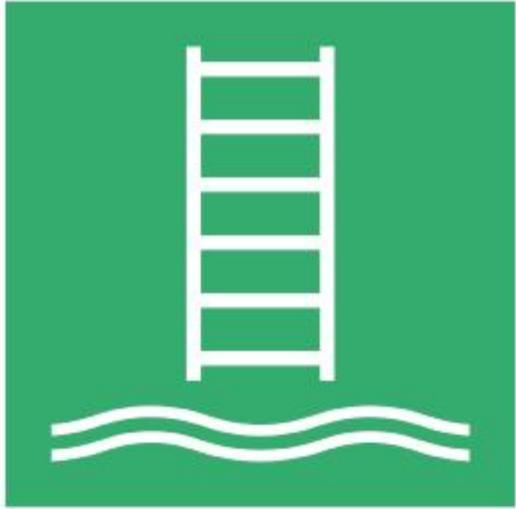
	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E053</p>
	<b>Referent</b> <p style="text-align: center;">Embarkation ladder</p>
	<b>Function</b> To indicate the location of an embarkation ladder
	<b>Image content</b> Ladder (six horizontal lines between two parallel vertical lines), two wavy lines
<b>Hazard</b> Not being able to locate an embarkation ladder	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of an embarkation ladder	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E054</p>
	<p><b>Referent</b></p> <p>Marine evacuation slide</p>
	<p><b>Function</b></p> <p>To indicate the location of a marine evacuation slide</p>
	<p><b>Image content</b></p> <p>Slide terminating in open raft, two wavy lines</p>
<p><b>Hazard</b></p> <p>Not being able to locate a marine evacuation slide</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a marine evacuation slide</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E055</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Marine evacuation chute</b></p>
	<b>Function</b> To indicate the location of a marine evacuation chute
	<b>Image content</b> Chute, liferaft, two wavy lines
<b>Hazard</b> Not being able to locate a marine evacuation chute	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a marine evacuation chute	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E056</p>
	<b>Referent</b> <p style="text-align: center;">Survival clothing</p>
	<b>Function</b> To indicate the location of survival clothing
	<b>Image content</b> Standing full body survival suit with hood
<b>Hazard</b> Not being able to locate survival clothing	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of survival clothing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-E057</p>
	<b>Referent</b> <p style="text-align: center;"><b>Door opens by pulling on the left-hand side</b></p>
	<b>Function</b> <p>To indicate that the door opens by pulling on the left-hand side</p>
	<b>Image content</b> <p>Doorway with door opening inwards, curved arrow pointing to the right</p>
<b>Hazard</b> <p>Not being able to open the door</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware that the door opens by pulling on the left-hand side</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

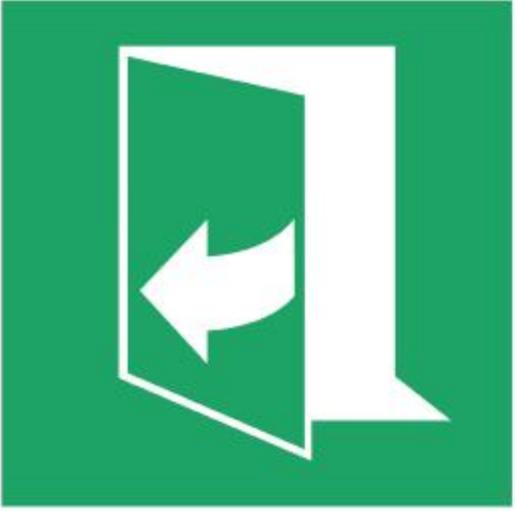
	<p><b>Reference No.</b></p> <p>ISO 7010-E058</p>
	<p><b>Referent</b></p> <p>Door opens by pulling on the right-hand side</p>
	<p><b>Function</b></p> <p>To indicate that the door opens by pulling on the right-hand side</p>
	<p><b>Image content</b></p> <p>Doorway with door opening inwards, curved arrow pointing to the left</p>
<p><b>Hazard</b></p> <p>Not being able to open the door</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware that the door opens by pulling on the right-hand side</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E059</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Escape ladder</b></p>
	<b>Function</b> To indicate the location of a permanently fixed escape ladder
	<b>Image content</b> Ladder (six horizontal lines between two parallel vertical lines)
<b>Hazard</b> Not being able to locate a fixed escape ladder and identify it as such	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fixed escape ladder	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-E060</p>
	<p><b>Referent</b></p> <p>Evacuation chair</p>
	<p><b>Function</b></p> <p>To indicate the location of an evacuation chair</p>
	<p><b>Image content</b></p> <p>Human figure sitting in an evacuation chair, human figure handling the evacuation chair, staircase (all right-hand profile)</p>
<p><b>Hazard</b></p> <p>Not being able to locate an evacuation chair</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of an evacuation chair</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-E061</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Water life-saving equipment</b></p>
	<b>Function</b> <p>To indicate the location of water life-saving equipment</p>
	<b>Image content</b> <p>Lifebelt ring with rope</p>
<b>Hazard</b> <p>Not being able to locate the public rescue equipment which is provided to assist in the avoidance of drowning</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>People being aware of location of public rescue equipment at the time of need</p>	
<b>Additional information</b> <p>A supplementary sign shall be used to give further information about the kind of water life-saving equipment.</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 3 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-E062</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Tsunami evacuation area</b></p>
	<p><b>Function</b></p> <p>To indicate the location of a safe place/uphill area for evacuation to in the event of a tsunami</p>
	<p><b>Image content</b></p> <p>Human figure (moving to the right) between a slope of land mass and a tsunami wave</p>
<p><b>Hazard</b></p> <p>Tsunami wave originating from an ocean-floor seismic event in which people could be caught if they have not reached the tsunami evacuation area</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Evacuation from coastal/beach zone towards higher place/hill in the event of an earthquake or when a tsunami warning has been issued</p>	
<p><b>Additional information</b></p> <p>This water safety sign has been the subject of extensive research by the Japanese government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 3 (continued)

	<b>Reference No.</b> <b>ISO 7010-E063</b>
	<b>Referent</b> <b>Tsunami evacuation building</b>
	<b>Function</b> To indicate the location of a safe building for evacuation in the event of a tsunami
	<b>Image content</b> Human figure between a building and a tsunami wave
<b>Hazard</b> Tsunami wave originating from an ocean-floor seismic event in which people could be caught if they have not reached the tsunami evacuation building	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Evacuation from coastal/beach zone towards a tsunami evacuation building in the event of an earthquake or when a tsunami warning has been issued	
<b>Additional information</b> This water safety sign has been the subject of extensive research by the Japanese government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 — Description and application of referent for fire equipment signs (category F)

	<b>Reference No.</b> ISO 7010-F001
	<b>Referent</b> Fire extinguisher
	<b>Function</b> To indicate the location of a fire extinguisher
	<b>Image content</b> Fire extinguisher (profile) with label, flame determinant
<b>Hazard</b> Not being able to locate a fire extinguisher	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fire extinguisher	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F002</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Fire hose reel</b></p>
	<b>Function</b> To indicate the location of a fire hose reel
	<b>Image content</b> Seven vertical lines, one with a trapezoid underneath, circle with cross and line attached to vertical bar, flame determinant
<b>Hazard</b> Not being able to locate a fire hose reel	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fire hose reel	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

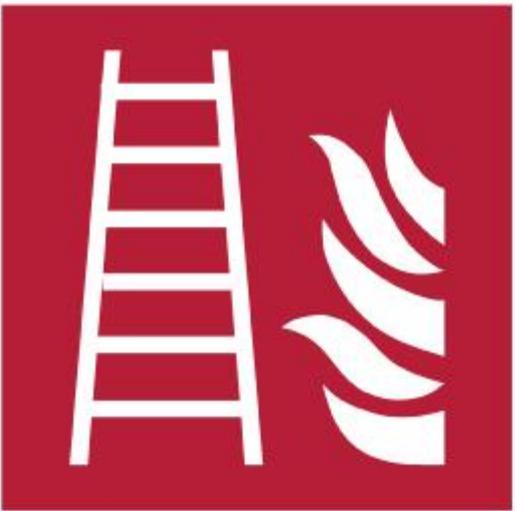
	<p><b>Reference No.</b></p> <p>ISO 7010-F003</p>
	<p><b>Referent</b></p> <p>Fire ladder</p>
	<p><b>Function</b></p> <p>To indicate the location of a ladder that is to be used exclusively for firefighting</p>
	<p><b>Image content</b></p> <p>Two converging vertical lines, six horizontal lines joining the vertical lines, flame determinant</p>
<p><b>Hazard</b></p> <p>Not being able to locate a fire ladder</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a fire ladder and recognizing that the use of this ladder is dedicated to firefighting only</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-F004</p>
	<b>Referent</b> <p style="text-align: center;">Collection of firefighting equipment</p>
	<b>Function</b> To indicate the location of firefighting equipment
	<b>Image content</b> Fire helmet (profile), flame determinant
<b>Hazard</b> Not being able to locate firefighting equipment	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of firefighting equipment	
<b>Additional information</b> This safety sign should be used for firefighting equipment for which there is no registered safety sign. The fire helmet may be replaced with another fire helmet appropriate to cultural requirements. Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F005</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Fire alarm call point</b></p>
	<b>Function</b> To indicate the location of a fire alarm call point
	<b>Image content</b> Hand (plan view) with one finger extended, dot in square (outlined) broken at bottom, flame determinant
<b>Hazard</b> Not being able to locate a fire alarm call point	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fire alarm call point	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-F006</p>
	<b>Referent</b> <p style="text-align: center;">Fire emergency telephone</p>
	<b>Function</b> To indicate the location of a fire emergency telephone
	<b>Image content</b> Telephone receiver (profile), flame determinant
<b>Hazard</b> Not being able to locate a fire emergency telephone	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fire emergency telephone	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

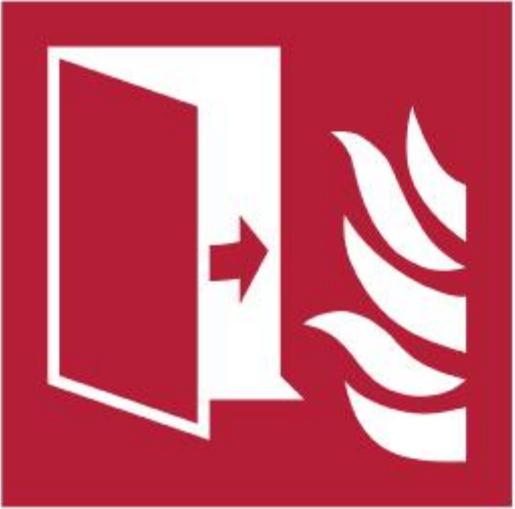
	<p><b>Reference No.</b></p> <p>ISO 7010-F007</p>
	<p><b>Referent</b></p> <p>Fire protection door</p>
	<p><b>Function</b></p> <p>To indicate the location of a fire protection door</p>
	<p><b>Image content</b></p> <p>Door at angle, curved arrow, flame determinant</p>
<p><b>Hazard</b></p> <p>Not being able to locate and identify a fire protection door</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Identifying the door as a fire protection door</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F008</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Fixed fire extinguishing battery</b></p>
	<b>Function</b> To indicate the location of a fixed fire extinguishing battery
	<b>Image content</b> Four bottles attached to a manifold, flame determinant
<b>Hazard</b> Not being able to locate a fixed fire extinguishing battery	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fixed fire extinguishing battery	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-F009</p>
	<p><b>Referent</b></p> <p>Wheeled fire extinguisher</p>
	<p><b>Function</b></p> <p>To indicate the location of a wheeled fire extinguisher</p>
	<p><b>Image content</b></p> <p>Bottle on wheeled cart (profile), flame determinant</p>
<p><b>Hazard</b></p> <p>Not being able to locate a wheeled fire extinguisher</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a wheeled fire extinguisher</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F010</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Portable foam applicator unit</b></p>
	<b>Function</b> To indicate the location of a portable foam applicator unit
	<b>Image content</b> Foam can with goose neck hose terminating with a venturi nozzle, flame determinant
<b>Hazard</b> Not being able to locate a portable foam applicator unit	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a portable foam applicator unit	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F011</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Water fog applicator</b></p>
	<b>Function</b> <p>To indicate the location of a water fog applicator</p>
	<b>Image content</b> <p>90° bend terminating in a nozzle with five non-parallel segmented lines, flame determinant</p>
<b>Hazard</b> <p>Not being able to locate a water fog applicator</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of a water fog applicator</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-F012</p>
	<b>Referent</b> <p style="text-align: center;">Fixed fire extinguishing installation</p>
	<b>Function</b> To indicate the location of a fixed fire extinguishing installation
	<b>Image content</b> Tank (profile) supported on a frame at two points, flame determinant
<b>Hazard</b> Not being able to locate a fixed fire extinguishing installation	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Being aware of the location of a fixed fire extinguishing installation	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 4 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-F013</p>
	<p><b>Referent</b></p> <p>Fixed fire extinguishing bottle</p>
	<p><b>Function</b></p> <p>To indicate the location of a fixed fire extinguishing bottle</p>
	<p><b>Image content</b></p> <p>Bottle (head-on view) supported on its side on a frame at two points, flame determinant</p>
<p><b>Hazard</b></p> <p>Not being able to locate a fixed fire extinguishing bottle</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a fixed fire extinguishing bottle</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F014</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Remote release station</b></p>
	<b>Function</b> To indicate the location of a remote release station
	<b>Image content</b> Bottle with a knob handle on top, flame determinant
<p><b>Hazard</b>                  Not being able to locate a remote release station</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b>                  Being aware of the location of a remote release station</p> <p><b>Additional information</b>                  Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-F015</p>
	<p><b>Referent</b></p> <p>Fire monitor</p>
	<p><b>Function</b></p> <p>To indicate the location of a fire monitor</p>
	<p><b>Image content</b></p> <p>Fire monitor (profile), flame determinant</p>
<p><b>Hazard</b></p> <p>Not being able to locate a fire monitor</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Being aware of the location of a fire monitor</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 4 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-F016</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Fire blanket</b></p>
	<b>Function</b> <p>To indicate the location of a fire blanket</p>
	<b>Image content</b> <p>Human figure holding a fire blanket, flame determinant</p>
<b>Hazard</b> <p>Not being able to locate a fire blanket</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Being aware of the location of a fire blanket</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 — Description and application of referent for mandatory action signs (category M)

	<b>Reference No.</b> ISO 7010-M001
	<b>Referent</b> General mandatory action sign
	<b>Function</b> To signify a mandatory action
	<b>Image content</b> Exclamation mark
<b>Hazard</b> Risk to people not following the mandatory action specified by the supplementary sign	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Carrying out the mandatory action specified by the supplementary sign	
<b>Additional information</b> This safety sign cannot be used on its own and requires a supplementary sign to give further information about the action to be taken.	

Table 5 (continued)

	<b>Reference No.</b> <b>ISO 7010-M002</b>
	<b>Referent</b> <b>Refer to instruction manual/booklet</b>
	<b>Function</b> To signify that the instruction manual/booklet must be read
	<b>Image content</b> Upper human figure (right-hand profile) holding an open manual/booklet
<b>Hazard</b> Not reading the instruction manual/booklet before starting work or before operating equipment or machinery	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Reading the instruction manual/booklet before starting work or before operating equipment or machinery	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M003</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear ear protection</b></p>
	<p><b>Function</b></p> <p>To signify that ear protection must be worn</p>
	<p><b>Image content</b></p> <p>Human head (front view) wearing ear protection</p>
<p><b>Hazard</b></p> <p>Noise</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing ear protection</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M004</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Wear eye protection</b></p>
	<b>Function</b> <p>To signify that eye protection must be used</p>
	<b>Image content</b> <p>Human head (front view) wearing eye protection</p>
<b>Hazard</b> <p>Flying objects/particles</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Wearing eye protection</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M005</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Connect an earth terminal to the ground</b></p>
	<p><b>Function</b></p> <p>To signify that an earth terminal must be connected</p>
	<p><b>Image content</b></p> <p>Vertical line joining horizontal line with two progressively shorter parallel horizontal lines underneath</p>
<p><b>Hazard</b></p> <p>Electric shock, explosion, fire</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Connecting an earth terminal of a product to the ground</p>	
<p><b>Additional information</b></p> <p>This safety sign relates to products employing a class I insulating system which requires protective earthing.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

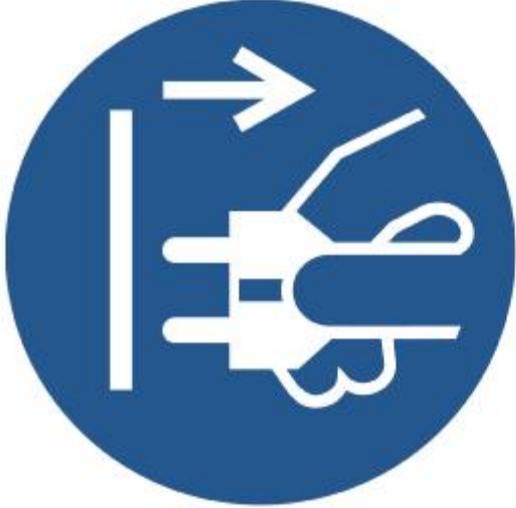
	<b>Reference No.</b> <b>ISO 7010-M006</b>
	<b>Referent</b> <b>Disconnect mains plug from electrical outlet</b>
	<b>Function</b> To signify that the mains plug must be disconnected from electrical outlet for the purposes of maintenance of electrical equipment, in the case of malfunction or when left unattended
	<b>Image content</b> Two fingers and thumb (outlined) holding a two-pin electrical plug, arrow pointing right, vertical line
<b>Hazard</b> Electric shock, fire	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Disconnecting the mains plug for the purposes of maintenance, in the case of malfunction or when left unattended	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. If necessary, a supplementary sign shall be used to give further information on when to disconnect the mains plug from electrical outlet.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p><b>ISO 7010-M007</b></p>
	<p><b>Referent</b></p> <p><b>Opaque eye protection must be worn</b></p>
	<p><b>Function</b></p> <p>To signify that opaque eye protection must be worn</p>
	<p><b>Image content</b></p> <p>Human head (front view) wearing opaque eye protection</p>
<p><b>Hazard</b></p> <p>Visible or invisible rays</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Ensuring that people undergoing treatment with visible or invisible rays are wearing opaque eye protection</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <b>ISO 7010-M008</b>
	<b>Referent</b> <b>Wear safety footwear</b>
	<b>Function</b> To signify that safety footwear must be worn
	<b>Image content</b> Two safety boots, one shown in front, the other shown behind (outlined)
<b>Hazard</b> Feet striking or being struck by objects or being in contact with thermal or chemical materials	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Wearing safety footwear	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M009</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear protective gloves</b></p>
	<p><b>Function</b></p> <p>To signify that protective gloves must be worn</p>
	<p><b>Image content</b></p> <p>Two protective gloves, one shown in front, the other shown behind (outlined)</p>
<p><b>Hazard</b></p> <p>Hands striking or being struck by objects or being in contact with thermal or chemical materials</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing protective gloves</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M010</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Wear protective clothing</b></p>
	<b>Function</b> <p>To signify that protective clothing must be worn</p>
	<b>Image content</b> <p>Overall (front view)</p>
<b>Hazard</b> <p>Chemicals, heat or cold</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Wearing protective clothing</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M011</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wash your hands</b></p>
	<p><b>Function</b></p> <p>To signify that hands must be washed</p>
	<p><b>Image content</b></p> <p>Two hands, one shown in front, the other shown behind (outlined), three lines of four dots, tap</p>
<p><b>Hazard</b></p> <p>Infection or contamination</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Washing hands before starting work task and after finishing work task</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <b>ISO 7010-M012</b>
	<b>Referent</b> <b>Use handrail</b>
	<b>Function</b> To signify that the handrail must be used
	<b>Image content</b> Upper human figure (left-hand profile) with left arm touching diagonal line
<b>Hazard</b> Falling, slipping or tripping	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Holding the handrail when using stairs, escalators or moving walkways	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M013</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear a face shield</b></p>
	<p><b>Function</b></p> <p>To signify that a face shield must be worn</p>
	<p><b>Image content</b></p> <p>Human head (left-hand profile, outlined) wearing a face shield</p>
<p><b>Hazard</b></p> <p>Flying objects/particles</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing a face shield</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M014</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Wear head protection</b></p>
	<b>Function</b> <p>To signify that head protection must be worn</p>
	<b>Image content</b> <p>Human head (left-hand profile, outlined) wearing head protection</p>
<b>Hazard</b> <p>Objects falling on head or head striking objects</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Wearing head protection</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M015</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear high-visibility clothing</b></p>
	<p><b>Function</b></p> <p>To signify that high-visibility clothing must be worn</p>
	<p><b>Image content</b></p> <p>Sleeveless jacket (front view) with two vertical and two horizontal lines</p>
<p><b>Hazard</b></p> <p>Moving vehicles or equipment</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing high-visibility clothing</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> ISO 7010-M016
	<b>Referent</b> Wear a mask
	<b>Function</b> To signify that a face mask must be worn
	<b>Image content</b> Human head (left-hand profile, outlined) wearing a mask
<b>Hazard</b> Particulates in the air	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Wearing a face mask	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M017</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear respiratory protection</b></p>
	<p><b>Function</b></p> <p>To signify that respiratory protection must be worn</p>
	<p><b>Image content</b></p> <p>Human head (front view, outlined) wearing respiratory protection</p>
<p><b>Hazard</b></p> <p>Harmful substances (e.g. noxious gases)</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing respiratory protection</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <b>ISO 7010-M018</b>
	<b>Referent</b> <b>Wear a safety harness</b>
	<b>Function</b> To signify that a safety harness must be worn
	<b>Image content</b> Human figure (outlined) wearing a safety harness
<b>Hazard</b> Falling from a height	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Wearing a safety harness	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M019</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear a welding mask</b></p>
	<p><b>Function</b></p> <p>To signify that a welding mask must be worn</p>
	<p><b>Image content</b></p> <p>Human head (left-hand profile, outlined) wearing a welding mask</p>
<p><b>Hazard</b></p> <p>Hot flying particles, intense light and UV radiation from welding activity</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing a welding mask</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

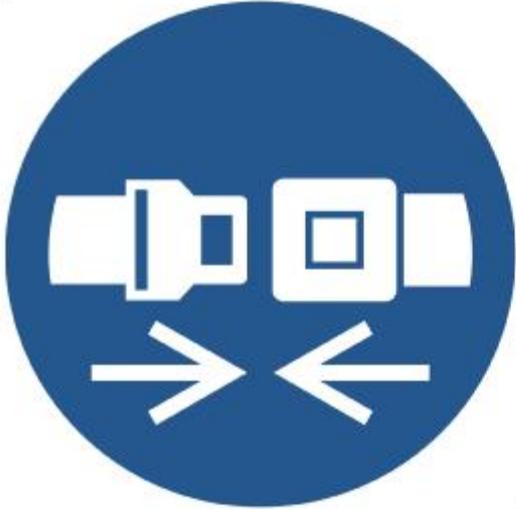
	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M020</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Wear safety belts</b></p>
	<b>Function</b> <p>To signify that safety belts must be used</p>
	<b>Image content</b> <p>End of belts with a buckle and two arrows pointing to each other</p>
<b>Hazard</b> <p>Being projected from the seat of a vehicle or equipment</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Wearing safety belts</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M021</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Disconnect before carrying out maintenance or repair</b></p>
	<p><b>Function</b></p> <p>To signify that the machine or the equipment, which is not connected to mains by a plug, has to be disconnected from all sources of power before carrying out maintenance or repair</p>
	<p><b>Image content</b></p> <p>Horizontal arrow pointing to the right; one vertical short thick line attached to a circle at the bottom with a longer thick line at an angle to the right attached to the top of the circle; a further thick line in the same plane as the lower one, separated from the line at an angle</p>
<p><b>Hazard</b></p> <p>Machine or equipment running during maintenance or repair</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Disconnecting the machine or equipment before carrying out maintenance or repair</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M022</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Use barrier cream</b></p>
	<b>Function</b> <p>To signify that the skin has to be protected with an appropriate barrier cream</p>
	<b>Image content</b> <p>Human hand, tube, wavy line</p>
<b>Hazard</b> <p>Damage to the skin</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Protecting the skin with barrier cream before starting work or putting on gloves</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M023</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Use footbridge</b></p>
	<b>Function</b> <p>To signify that a footbridge must be used</p>
	<b>Image content</b> <p>Human figure walking on a footbridge</p>
<b>Hazard</b> <p>Moving vehicles, obstructions, or tripping or falling</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Using the footbridge to avoid dangerous areas</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M024</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Use this walkway</b></p>
	<b>Function</b> <p>To signify that pedestrians must use a designated walkway</p>
	<b>Image content</b> <p>Human figure walking (left hand)</p>
<b>Hazard</b> <p>Areas unsafe for pedestrians</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Pedestrians using the designated walkway</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M025</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Protect infant's eyes with opaque eye protection</b></p>
	<p><b>Function</b></p> <p>To signify that opaque eye protection must be worn by an infant</p>
	<p><b>Image content</b></p> <p>Infant (outlined) wearing opaque eye protection</p>
<p><b>Hazard</b></p> <p>Intense light incident on an infant's eyes</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Ensuring that the infant's eyes are protected before switching the equipment on or before placing the infant into the radiated area</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M026</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Use protective apron</b></p>
	<b>Function</b> <p>To signify that the front of the body must be protected by an apron</p>
	<b>Image content</b> <p>Human figure (outlined) with an apron</p>
<b>Hazard</b> <p>Front of body striking or being struck by objects or coming into contact with substances or materials</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Protecting the front of the body</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M027</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Check guard</b></p>
	<p><b>Function</b></p> <p>To signify that checks must be conducted to ensure that guards are in place or used</p>
	<p><b>Image content</b></p> <p>Series of horizontal and vertical lines and two interlocking illustrations of cog wheels</p>
<p><b>Hazard</b></p> <p>Moving machinery</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Ensuring that guards are in place before operating the machinery</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M028</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Keep locked</b></p>
	<b>Function</b> <p>To signify that a cabinet or facility must be kept locked</p>
	<b>Image content</b> <p>Padlock with keyhole and four complete chain links and two pieces</p>
<b>Hazard</b> <p>Access to harmful substances or equipment</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Ensuring that cabinets or facilities containing harmful substances or equipment are kept locked</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <b>ISO 7010-M029</b>
	<b>Referent</b> <b>Sound horn</b>
	<b>Function</b> To signify that a horn must be sounded
	<b>Image content</b> Horn, three curved lines
<b>Hazard</b> Collision with another vehicle or with people	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Equipment operator or driver sounding horn	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M030</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Use litter bin</b></p>
	<b>Function</b> To signify that litter must be placed in a litter bin
	<b>Image content</b> Human figure, bin/container and four diamond shapes
<b>Hazard</b> Material which is harmful or could create a tripping or slipping hazard	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Putting litter in a bin or container	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary sign shall be used to specify the kind of litter to be placed in the litter bin.	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p><b>ISO 7010-M031</b></p>
	<p><b>Referent</b></p> <p><b>Use table saw adjustable guard</b></p>
	<p><b>Function</b></p> <p>To signify that the adjustable guard must be used</p>
	<p><b>Image content</b></p> <p>Semicircular saw blade with semicircular cover, curved arrow pointing downwards, single line and block shape</p>
<p><b>Hazard</b></p> <p>Circular saw</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Ensuring that the saw is guarded</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M032</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear anti-static footwear</b></p>
	<p><b>Function</b></p> <p>To signify that anti-static footwear must be worn</p>
	<p><b>Image content</b></p> <p>End of leg, shoe with lightning bolt on sole</p>
<p><b>Hazard</b></p> <p>Creation of static electricity that can cause sparks leading to fire and explosions</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing anti-static footwear</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M033</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Close safety bar of chairlift</b></p>
	<p><b>Function</b></p> <p>To signify that the safety bar of the chairlift must be closed</p>
	<p><b>Image content</b></p> <p>Human figure (right-hand profile) sitting in chairlift with safety bar up, curved arrow pointing downwards</p>
<p><b>Hazard</b></p> <p>Safety bar closed too late</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Closing the safety bar of a chairlift</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M034</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Open safety bar of chairlift</b></p>
	<b>Function</b> <p>To signify that the safety bar of the chairlift must be opened</p>
	<b>Image content</b> <p>Human figure (right-hand profile) sitting in chairlift with safety bar down, curved arrow pointing upwards</p>
<b>Hazard</b> <p>Safety bar opened too early</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Opening the safety bar of a chairlift</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M035</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Immediately leave the tow-track in the event of falling</b></p>
	<p><b>Function</b></p> <p>To signify that the tow-track must be left immediately in the event of falling</p>
	<p><b>Image content</b></p> <p>Human figure on skis, two parallel straight lines, arrow pointing to the right</p>
<p><b>Hazard</b></p> <p>Obstruction on the tow-track</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Leaving the tow-track after falling</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M036</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Lift ski tips</b></p>
	<b>Function</b> <p>To signify that ski tips must be lifted</p>
	<b>Image content</b> <p>Human figure (right-hand profile) with skis sitting in chairlift, arrow pointing upwards</p>
<b>Hazard</b> <p>Crashing of the ski tips into technical parts of the cableway</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Lifting the ski tips</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M037</b></p>
	<p><b>Referent</b></p> <p><b>Close and secure hatches in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that hatches on a lifeboat, fully enclosed rescue boat or rigid liferaft must be closed and secured in launch sequence</p>
	<p><b>Image content</b></p> <p>Hand around a hatch handle with arrow pointing to the right above curved arrow pointing in clockwise direction</p>
<p><b>Hazard</b></p> <p>Uncontrolled flooding, exposure to a hazardous atmosphere, loss of breathable air from the self-contained air support system, fire and smoke</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Closing and securing hatches at the appropriate time</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M038</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Start engine in launch sequence</b></p>
	<b>Function</b> <p>To signify that the engine of a lifeboat or rescue boat must be started in launch sequence</p>
	<b>Image content</b> <p>Handcrank and curved arrow pointing in clockwise direction</p>
<b>Hazard</b> <p>No propulsion at the time of need or the engine is started too early in the sequence to launch</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Starting the engine at the appropriate time</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

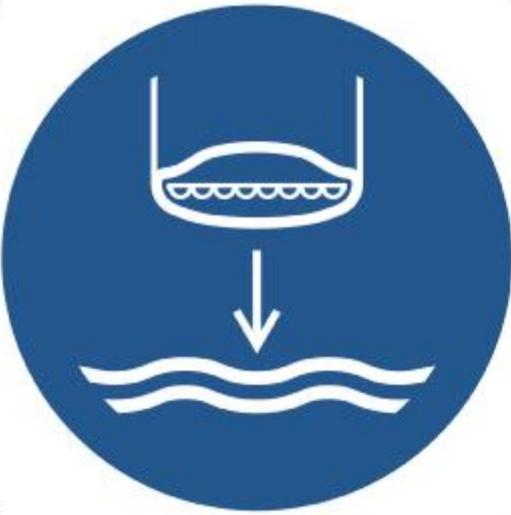
	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M039</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Lower lifeboat to the water in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that the lifeboat must be lowered in launch sequence</p>
	<p><b>Image content</b></p> <p>Lifeboat on two falls, arrow pointing down, two wavy lines</p>
<p><b>Hazard</b></p> <p>Lifeboat is not lowered to the water at the appropriate time</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Lowering the lifeboat at the appropriate time</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M040</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Lower liferaft to the water in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that the liferaft must be lowered in launch sequence</p>
	<p><b>Image content</b></p> <p>Liferaft on single fall, arrow pointing down, two wavy lines</p>
<p><b>Hazard</b></p> <p>Liferaft is not lowered to the water at the appropriate time</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Lowering the liferaft at the appropriate time</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p><b>ISO 7010-M041</b></p>
	<p><b>Referent</b></p> <p><b>Lower rescue boat to the water in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that the rescue boat must be lowered in launch sequence</p>
	<p><b>Image content</b></p> <p>Boat on two falls, two upper human figures, one of them outlined, arrow pointing down, two wavy lines</p>
<p><b>Hazard</b></p> <p>Rescue boat is not lowered to the water at the appropriate time</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Lowering the rescue boat at the appropriate time</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M042</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Release falls in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that the lifeboat or rescue boat falls must be released in launch sequence</p>
	<p><b>Image content</b></p> <p>Hook on pivot attached to two sloping lines, curved arrow pointing in anticlockwise direction from a U-shape</p>
<p><b>Hazard</b></p> <p>Lifeboat or rescue boat release hook is not released from the fall or falls at the appropriate time</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Releasing falls at the appropriate time</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

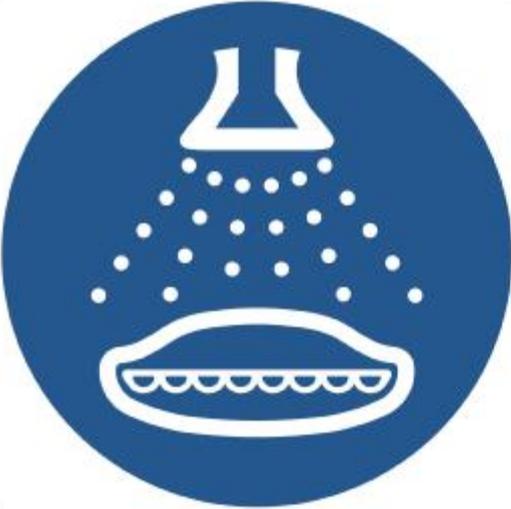
	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M043</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Start water spray in launch sequence</b></p>
	<b>Function</b> <p>To signify that the water spray system for a lifeboat must be energized in launch sequence</p>
	<b>Image content</b> <p>Nozzle and dotted lines above lifeboat</p>
<b>Hazard</b> <p>Fire on or near the water surface or hazardous cargo release that may contaminate the outer surface of the boat</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Energizing the water spray system at the appropriate time</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M044</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Start air supply in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that the self-contained air support system must be energized in launch sequence</p>
	<p><b>Image content</b></p> <p>Bellows with three arrows at the nozzle pointing away in a radial pattern</p>
<p><b>Hazard</b></p> <p>Fire and/or hazardous atmosphere that consumes oxygen necessary to sustain life inside the lifeboat and provide combustion air for the diesel propulsion engine of the lifeboat</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Energizing the self-contained air support system at the appropriate time</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M045</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Release lifeboat gripes in launch sequence</b></p>
	<p><b>Function</b></p> <p>To signify that the lifeboat gripes must be released in launch sequence</p>
	<p><b>Image content</b></p> <p>Lifeboat suspended on a fall in a davit with a gripe surrounding the boat; arrow pointing at the release point of the gripe</p>
<p><b>Hazard</b></p> <p>Lifeboat remains secured to the cradle and davit and cannot be lowered</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Releasing the gripes of a lifeboat at the appropriate time</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M046</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Secure gas cylinders</b></p>
	<b>Function</b> <p>To signify that gas cylinders must be secured</p>
	<b>Image content</b> <p>Upper part of gas cylinder, chain</p>
<b>Hazard</b> <p>Falling gas cylinder causing crush, explosion or release of gas</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Securing gas cylinders</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M047</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Use self-contained breathing appliance</b></p>
	<p><b>Function</b></p> <p>To signify that a self-contained breathing appliance must be used</p>
	<p><b>Image content</b></p> <p>Upper human figure (left-hand profile, outlined) wearing a compressed air cylinder and mask connected by a tube</p>
<p><b>Hazard</b></p> <p>Harmful gases and lack of oxygen</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Using a self-contained breathing appliance</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M048</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Use gas detector</b></p>
	<b>Function</b> <p>To signify that a gas detector must be used</p>
	<b>Image content</b> <p>Front of a block with a small cylinder on top and on the front plane a curved scale with markers and pointer; three curved arrows; three lines with several curves</p>
<b>Hazard</b> <p>Hazardous gases or vapours, explosive atmosphere</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Using a gas detector</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M049</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear protective roller sport equipment</b></p>
	<p><b>Function</b></p> <p>To signify that protective roller sport equipment must be worn</p>
	<p><b>Image content</b></p> <p>Human figure (outlined) wearing head, wrist, palm, knee and elbow protectors</p>
<p><b>Hazard</b></p> <p>Unprotected body and limb impacts with surfaces and obstacles</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing protective roller sport equipment when doing roller sport</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-M050</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Alighting from toboggan to the left</b></p>
	<b>Function</b> <p>To signify that the user must alight from toboggan to the left</p>
	<b>Image content</b> <p>Toboggan user alighting from a toboggan to the left, horizontal line underneath, arrow pointing to the left</p>
<b>Hazard</b> <p>Hazards that do not allow alighting safely other than to the left-hand side</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Alighting from toboggan to the left</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M051</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Alighting from toboggan to the right</b></p>
	<p><b>Function</b></p> <p>To signify that the user must alight from toboggan to the right</p>
	<p><b>Image content</b></p> <p>Toboggan user alighting from a toboggan to the right, horizontal line underneath, arrow pointing to the right</p>
<p><b>Hazard</b></p> <p>Hazards that do not allow alighting safely other than to the right-hand side</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Alighting from toboggan to the right</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M052</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Keep distance between toboggans</b></p>
	<p><b>Function</b></p> <p>To signify that a distance must be kept between toboggans</p>
	<p><b>Image content</b></p> <p>Two seated human figures (left-hand profile), two toboggans above a sloping line, double-ended arrow between the toboggans</p>
<p><b>Hazard</b></p> <p>Toboggan colliding with other toboggans</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Ensuring enough space between toboggans to allow toboggans to stop in dangerous situations and prevent collisions</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M053</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Wear personal flotation device</b></p>
	<p><b>Function</b></p> <p>To signify that a personal flotation device (lifejacket) must be worn</p>
	<p><b>Image content</b></p> <p>Human figure (outlined) wearing personal flotation device (lifejacket)</p>
<p><b>Hazard</b></p> <p>Not using a personal flotation device can result in a person drowning</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Wearing personal flotation device (lifejacket)</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 5 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-M054</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Keep children under supervision in the aquatic environment</b></p>
	<p><b>Function</b></p> <p>To signify that children must be kept under supervision in the aquatic environment</p>
	<p><b>Image content</b></p> <p>Upper part of large human figure, upper part of small human figure with raised arm, arrow, two wavy lines</p>
<p><b>Hazard</b></p> <p>Children being in water where they could get into difficulties</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Adults supervising children playing in water or swimming</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 — Description and application of referent for prohibition signs (category P)

	<b>Reference No.</b> ISO 7010-P001
	<b>Referent</b> General prohibition sign
	<b>Function</b> To signify a prohibited action
	<b>Image content</b> None
<b>Hazard</b> Risk to people specified by the supplementary sign	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not doing an action specified by the supplementary sign	
<b>Additional information</b> This safety sign cannot be used on its own and requires a supplementary sign to give further information about the action which is prohibited.	

Table 6 (continued)

	<b>Reference No.</b> <b>ISO 7010-P002</b>
	<b>Referent</b> <b>No smoking</b>
	<b>Function</b> To prohibit smoking
	<b>Image content</b> Cigarette (profile, outlined) with two wavy lines
<b>Hazard</b> Fire or explosion caused by lit cigarettes or other smoking materials or harm from the smoke	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not smoking	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P003</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No open flame; Fire, open ignition source and smoking prohibited</b></p>
	<p><b>Function</b></p> <p>To prohibit smoking and all forms of open flame</p>
	<p><b>Image content</b></p> <p>Match (profile, outlined), flame</p>
<p><b>Hazard</b></p> <p>Fire or explosion caused by an open flame, open ignition source or smoking</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not having an open flame or open ignition source and not smoking</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P004</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No thoroughfare</b></p>
	<b>Function</b> To prohibit the use of a thoroughfare by pedestrians
	<b>Image content</b> Human figure walking (left hand)
<b>Hazard</b> Collision with vehicles or machinery	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using the thoroughfare	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P005
	<b>Referent</b> Not drinking water
	<b>Function</b> To prohibit drinking of unsuitable water
	<b>Image content</b> Tap above glass, two wavy lines
<b>Hazard</b> Water unsuitable for drinking	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not drinking the water	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P006</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No access for forklift trucks and other industrial vehicles</b></p>
	<p><b>Function</b></p> <p>To prohibit the use of forklift trucks and other industrial vehicles</p>
	<p><b>Image content</b></p> <p>Forklift truck (left-hand profile) with human figure</p>
<p><b>Hazard</b></p> <p>Moving forklift trucks and other industrial vehicles</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not using forklift trucks and other industrial vehicles</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P007</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No access for people with active implanted cardiac devices</b></p>
	<b>Function</b> <p>To prohibit people with active implanted cardiac devices from entering a designated area</p>
	<b>Image content</b> <p>Heart shape and representation of pulse generator connected by curved line</p>
<b>Hazard</b> <p>Interference to the operation of or damage to active implanted cardiac devices from equipment generating strong electromagnetic fields</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>People with active implanted cardiac devices not entering a designated area</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P008</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No metallic articles or watches</b></p>
	<b>Function</b> <p>To prohibit metallic articles or watches</p>
	<b>Image content</b> <p>Face and part of strap of an analogue wristwatch, flat side of a key</p>
<b>Hazard</b> <p>Strong magnetic fields</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Removing or not wearing metallic articles or watches</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P009</p>
	<b>Referent</b> <p style="text-align: center;">No climbing</p>
	<b>Function</b> To prohibit climbing
	<b>Image content</b> Human figure (rear view), six horizontal lines between two parallel vertical lines
<b>Hazard</b> Object unsafe to climb on and hazardous location/area	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not climbing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <b>ISO 7010-P010</b>
	<b>Referent</b> <b>Do not touch</b>
	<b>Function</b> To prohibit touching objects/parts of an object
	<b>Image content</b> Hand, horizontal line underneath
<b>Hazard</b> Dangerous surfaces	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not touching objects or parts of an object	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P011</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not extinguish with water</b></p>
	<b>Function</b> To prohibit using water to extinguish a fire
	<b>Image content</b> Bucket, area outlined by wavy line, flame
<b>Hazard</b> Dangerous reaction from the application of water to a burning substance	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using water to extinguish a fire	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P012</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No heavy load</b></p>
	<b>Function</b> <p>To prohibit the placing of heavy objects on a surface</p>
	<b>Image content</b> <p>Weight resting on the two parts of a line which is broken in the centre so that the two halves are separated and each inclines downward</p>
<p><b>Hazard</b> Breakage due to heavy load</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not placing any heavy objects on a surface</p> <p><b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. In spite of this, the following needs to be considered: "Heavy" depends on the context of use and if it needs to be specified, a supplementary sign should be added stating the maximum permissible load, for example as follows: max. 100 kg.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P013</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No activated mobile phone</b></p>
	<p><b>Function</b></p> <p>To prohibit activated mobile phones</p>
	<p><b>Image content</b></p> <p>Mobile phone (front view), six curved lines</p>
<p><b>Hazard</b></p> <p>Electromagnetic field</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Turning the mobile phone off or not switching it on</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P014</p>
	<b>Referent</b> <p style="text-align: center;">No access for people with metallic implants</p>
	<b>Function</b> <p>To prohibit access of people with metallic implants</p>
	<b>Image content</b> <p>Hip joint and socket (outlined) joined by a black hip implant</p>
<b>Hazard</b> <p>Invisible rays causing a rise in temperature of a metallic implant</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>People with metallic implants not entering a designated area</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P015
	<b>Referent</b> No reaching in
	<b>Function</b> To prohibit people putting hands into openings
	<b>Image content</b> Hand between two converging lines
<b>Hazard</b> Injury to hands	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not putting hands into designated openings	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P016</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not spray with water</b></p>
	<b>Function</b> To prohibit spraying
	<b>Image content</b> Water hose with nozzle, five divergent lines of dots
<b>Hazard</b> Electric shock, chemical reaction, fire	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not spraying with water on machines and equipment or areas where chemical reactions can occur	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P017</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No pushing</b></p>
	<b>Function</b> <p>To prohibit pushing against an object</p>
	<b>Image content</b> <p>Horizontal line and vertical block with human figure (right-hand profile) pushing against it</p>
<b>Hazard</b> <p>Objects overbalancing and falling</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Not pushing an object</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <b>ISO 7010-P018</b>
	<b>Referent</b> <b>No sitting</b>
	<b>Function</b> To prohibit sitting on a surface
	<b>Image content</b> Human figure (left-hand profile) in sitting position, horizontal line
<b>Hazard</b> Surface unsuitable to sit on	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not sitting on an unsuitable surface	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P019</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No stepping on surface</b></p>
	<b>Function</b> To prohibit stepping onto a surface
	<b>Image content</b> Human figure stepping up, line with right angle
<b>Hazard</b> Surface unsuitable for stepping onto	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not stepping onto an unsuitable surface	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P020</p>
	<b>Referent</b> <p style="text-align: center;">Do not use lift in the event of fire</p>
	<b>Function</b> <p>To prohibit use of lift in the event of fire</p>
	<b>Image content</b> <p>Outline of lift with two human figures standing inside and flames at the right-hand side of the lift</p>
<b>Hazard</b> <p>Being trapped in a lift during a fire</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Not using lift in the event of fire</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P021</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No dogs</b></p>
	<p><b>Function</b></p> <p>To prohibit taking dogs into designated areas</p>
	<p><b>Image content</b></p> <p>Dog (right-hand profile)</p>
<p><b>Hazard</b></p> <p>Infections due to dogs; harming of people caused by dog bites</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not taking dogs into a designated area</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P022</p>
	<b>Referent</b> <p style="text-align: center;">No eating or drinking</p>
	<b>Function</b> To prohibit eating and drinking
	<b>Image content</b> Three horizontal lines alongside a cup with straw
<b>Hazard</b> Ingestion of dangerous substances by food and drink contaminated at a designated area	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not eating or drinking in the designated area	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

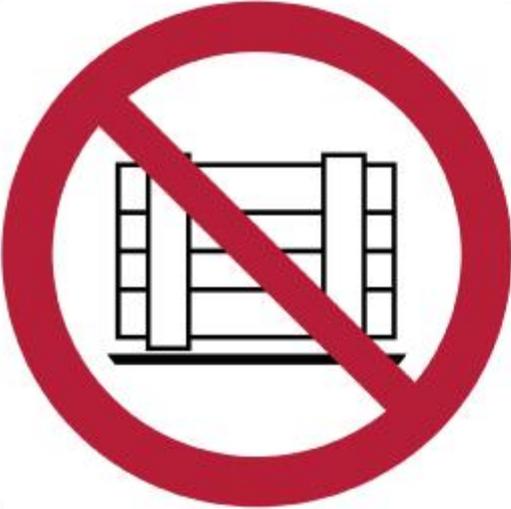
	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P023</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not obstruct</b></p>
	<b>Function</b> To prohibit the obstruction of a designated clear area
	<b>Image content</b> Crate (outlined), horizontal line underneath
<b>Hazard</b> Obstruction in a designated clear area	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not placing an obstruction in a designated clear area (e.g. escape routes, emergency exits, passageways)	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P024
	<b>Referent</b> Do not walk or stand here
	<b>Function</b> To prohibit walking or standing on a designated area
	<b>Image content</b> Two footprints
<b>Hazard</b> Areas which are unsafe for people to walk or stand on	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Keeping off a designated area	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P025</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not use this incomplete scaffold</b></p>
	<p><b>Function</b></p> <p>To prohibit the use of scaffolding systems which are not complete</p>
	<p><b>Image content</b></p> <p>Human figure (right-hand profile) walking on a broken horizontal bar surrounded by vertical and horizontal lines</p>
<p><b>Hazard</b></p> <p>Incomplete scaffold</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not using an incomplete scaffold</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P026
	<b>Referent</b> Do not use this device in a bathtub, shower or water-filled reservoir
	<b>Function</b> To prohibit the use of unsuitable electrical equipment in or near water
	<b>Image content</b> Shower and bathtub
<b>Hazard</b> Electric shock	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using electrically powered equipment in bathtubs, showers or water-filled reservoirs	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P027</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not use this lift for people</b></p>
	<p><b>Function</b></p> <p>To prohibit the use of the lift for the transportation of people</p>
	<p><b>Image content</b></p> <p>Human figure (front view) in a rectangle, short arrows above and underneath the rectangle</p>
<p><b>Hazard</b></p> <p>Goods or freight lifts without the safety features necessary for the transportation of people</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not using the lift for the transportation of people</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P028</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not wear gloves</b></p>
	<b>Function</b> <p>To prohibit the use of gloves when operating a machine with drawing-in hazard</p>
	<b>Image content</b> <p>Two gloves, one outlined, one filled</p>
<b>Hazard</b> <p>Drawing-in hazard to people wearing gloves while operating a machine</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Operating a machine with drawing-in hazard without wearing gloves</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P029
	<b>Referent</b> No photography
	<b>Function</b> To prohibit the taking of photographs
	<b>Image content</b> Camera
<b>Hazard</b> Distraction of drivers, operatives and people working, particularly in dark environments	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not taking photographs	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P030</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not tie knots in rope</b></p>
	<p><b>Function</b></p> <p>To prohibit tying knots in a climbing rope</p>
	<p><b>Image content</b></p> <p>Climbing rope with a knot</p>
<p><b>Hazard</b></p> <p>Knots in a climbing rope</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not tying any knots in a climbing rope</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P031</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not alter the state of the switch</b></p>
	<p><b>Function</b></p> <p>To prohibit any change of the current energetic or mechanical state of a machine or equipment</p>
	<p><b>Image content</b></p> <p>Switch and two arrows</p>
<p><b>Hazard</b></p> <p>Change of the current energetic or mechanical state of a machine or equipment</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not switching</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P032</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not use for face grinding</b></p>
	<p><b>Function</b></p> <p>To prohibit the use of the grinding disc for face grinding</p>
	<p><b>Image content</b></p> <p>Horizontal line with two thicknesses and an angled step; grinding machine at an angle to the line</p>
<p><b>Hazard</b></p> <p>Breakage of grinding disc due to overstressing leading to flying objects</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not using the grinding disc for face grinding</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P033</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not use for wet grinding</b></p>
	<b>Function</b> To prohibit the use of the grinding disc for wet grinding
	<b>Image content</b> Horizontal line, two circles with random infilling of dots and outer circle touching line, tap with water drops
<b>Hazard</b> Breakage of grinding disc due to overstressing leading to flying objects	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using the grinding disc for wet grinding	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P034</p>
	<b>Referent</b> <p style="text-align: center;">Do not use with hand-held grinding machine</p>
	<b>Function</b> <p>To prohibit the use of the grinding disc with a hand-held grinding machine</p>
	<b>Image content</b> <p>Hand holding a grinding machine</p>
<b>Hazard</b> <p>Breakage of grinding disc due to overstressing leading to flying objects</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Not using the grinding disc with a hand-held grinding machine</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P035</p>
	<b>Referent</b> <p style="text-align: center;">Do not wear metal-studded footwear</p>
	<b>Function</b> <p>To prohibit the use of metal-studded footwear</p>
	<b>Image content</b> <p>End of leg, shoe with circles on sole</p>
<b>Hazard</b> <p>Lack of grip between metal-studded footwear and certain floor surface</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Not wearing metal-studded footwear</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P036
	<b>Referent</b> No children allowed
	<b>Function</b> To prohibit children from entering a dangerous area
	<b>Image content</b> Small boy and larger girl
<b>Hazard</b> Areas dangerous to children	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Children not entering a dangerous area	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P037</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not leave the tow-track</b></p>
	<p><b>Function</b></p> <p>To prohibit leaving the tow-track</p>
	<p><b>Image content</b></p> <p>Two parallel curved dashed lines running across two straight outlined tracks</p>
<p><b>Hazard</b></p> <p>Uneven surface and line supporting structure outside the tow-track, following users of the tow-track</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not leaving the tow-track</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P038</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not swing the chair</b></p>
	<b>Function</b> To prohibit swinging the chair
	<b>Image content</b> Two human figures (right-hand profile) sitting in two chairs, line above, curved arrow with two arrow heads
<b>Hazard</b> Chair falling down	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not swinging the chair	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P039
	<b>Referent</b> Hot works prohibited
	<b>Function</b> To prohibit hot works
	<b>Image content</b> Hand (outlined) holding a tool, four lines of different lengths, each with a star at the end, fifth star, three parallel wavy lines
<b>Hazard</b> Fire, explosion	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not doing hot works	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P040</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Do not set off fireworks</b></p>
	<b>Function</b> To prohibit setting off fireworks
	<b>Image content</b> Fireworks, sparks
<b>Hazard</b> Fire or explosion caused by setting off fireworks	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not setting off fireworks	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P041</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No leaning against</b></p>
	<b>Function</b> To prohibit leaning against an object
	<b>Image content</b> Human figure (left-hand profile) leaning backwards against a vertical line
<b>Hazard</b> Object overbalancing and falling or person breaking through	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not leaning against an object	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P042</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Not for pregnant women</b></p>
	<b>Function</b> <p>To prohibit pregnant women undertaking hazardous actions or activities</p>
	<b>Image content</b> <p>Standing pregnant female figure (right-hand profile)</p>
<b>Hazard</b> <p>Injury to the expectant mother or baby due to their lower tolerability to a particular situation</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Not undertaking hazardous actions or activities</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>The graphical symbol is the mirrored (and slightly adapted) standardized and registered public information symbol ISO 7001-PI PF 059 "Priority access for expecting mothers".</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-P043</p>
	<p><b>Referent</b></p> <p>Not for people in the state of intoxication</p>
	<p><b>Function</b></p> <p>To prohibit intoxicated people undertaking hazardous actions or activities</p>
	<p><b>Image content</b></p> <p>Unbalanced human figure with a bottle in hand, whirls and bubbles around the figure's head</p>
<p><b>Hazard</b></p> <p>Injury to people in the state of intoxication due to their lower tolerability to a particular situation</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not undertaking hazardous actions or activities when in the state of intoxication</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P044</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Use of smart glasses prohibited</b></p>
	<p><b>Function</b></p> <p>To prohibit using smart glasses</p>
	<p><b>Image content</b></p> <p>Conventional glasses (front perspective view) with a device for visual and multimedia data processing</p>
<p><b>Hazard</b></p> <p>Restricting people's field of view at work; distraction of drivers; mental stress/strain by unauthorized invasion of privacy</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not using smart glasses</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P046</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not stretch out of toboggan</b></p>
	<p><b>Function</b></p> <p>To prohibit stretching out of the toboggan</p>
	<p><b>Image content</b></p> <p>Seated human figure with both arms and legs outstretched, toboggan above horizontal line</p>
<p><b>Hazard</b></p> <p>Bumping or falling out caused by stretching out of the toboggan</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not stretching out of the toboggan</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P047</p>
	<b>Referent</b> <p style="text-align: center;">Do not ram into toboggans</p>
	<b>Function</b> <p>To prohibit ramming other toboggans</p>
	<b>Image content</b> <p>Two seated human figures (left-hand profile), two toboggans above sloping line, lines radiating from a point between the two toboggans</p>
<b>Hazard</b> <p>Toboggan colliding with other toboggans</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Not ramming into toboggans</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P048</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No running</b></p>
	<b>Function</b> To prohibit running
	<b>Image content</b> Human figure (left-hand profile) running
<b>Hazard</b> Falling or colliding caused by running	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No running	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P049</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No swimming</b></p>
	<b>Function</b> To prohibit swimming
	<b>Image content</b> Human figure swimming, two wavy lines
<b>Hazard</b> Water conditions or environment hazardous to swimmers	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No swimming	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P050</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No snorkelling</b></p>
	<b>Function</b> <p>To prohibit the use of snorkelling equipment</p>
	<b>Image content</b> <p>Human figure with snorkelling equipment, single wavy line</p>
<b>Hazard</b> <p>Snorkellers and their equipment being in an area where they could collide with other people or craft in the water</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>No snorkelling</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P051</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No sub-aqua diving</b></p>
	<b>Function</b> To prohibit the use of sub-aqua equipment
	<b>Image content</b> Human figure with sub-aqua equipment, three dots, single wavy line
<b>Hazard</b> Sub-aqua divers and their equipment being in an area where they could collide with other people or craft in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No sub-aqua diving	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-P052</p>
	<p><b>Referent</b></p> <p>No diving</p>
	<p><b>Function</b></p> <p>To prohibit diving into the water</p>
	<p><b>Image content</b></p> <p>Human figure diving, two wavy lines</p>
<p><b>Hazard</b></p> <p>Divers being in an area where they could collide with other people or encounter other hazards in the water</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>No diving</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P053
	<b>Referent</b> No sailing
	<b>Function</b> To prohibit sailing
	<b>Image content</b> Sailing boat, two wavy lines
<b>Hazard</b> Sailing boats being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No sailing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P054</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No windsurfing</b></p>
	<b>Function</b> To prohibit windsurfing
	<b>Image content</b> Human figure (left-hand profile), windsurfing board, two wavy lines
<b>Hazard</b> Windsurfing boards being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No windsurfing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P055</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No manually powered craft</b></p>
	<p><b>Function</b></p> <p>To prohibit the use of manually powered craft (e.g. rowing, sculling, paddling, punting, pedalo)</p>
	<p><b>Image content</b></p> <p>Human figure (right-hand profile) sitting in rowing boat, oar, two wavy lines</p>
<p><b>Hazard</b></p> <p>Manually powered craft being in an area where they could collide with people in the water</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not using manually powered craft</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P056
	<b>Referent</b> No mechanically powered craft
	<b>Function</b> To prohibit the use of mechanically powered craft
	<b>Image content</b> Mechanically powered craft, two wavy lines
<b>Hazard</b> Mechanically powered craft being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using mechanically powered craft	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-P057</p>
	<b>Referent</b> <p style="text-align: center;">No personal water craft</p>
	<b>Function</b> To prohibit the use of personal water craft (e.g. jet-ski)
	<b>Image content</b> Human figure (left-hand profile), personal water craft, two wavy lines
<b>Hazard</b> Personal water craft being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using personal water craft	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P058</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No towed water activity</b></p>
	<p><b>Function</b></p> <p>To prohibit towed water activity (e.g. water skiing, wakeboarding, doughnuts, banana craft)</p>
	<p><b>Image content</b></p> <p>Human figure (left-hand profile), water skis, tow rope, two wavy lines</p>
<p><b>Hazard</b></p> <p>Water skis, wakeboards, doughnuts, banana craft or tow ropes being in an area where they could collide with people in the water</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not carrying out towed water activity</p>	
<p><b>Additional information</b></p> <p>The tow rope needs to extend into the exclusion zone (as specified in ISO 3864-3) in order to convey clearly the image of a continuous tow rope extending outside the visual scene portrayed.</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P059</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No surf craft</b></p>
	<b>Function</b> To prohibit the use of surf craft (e.g. surfboards, surf skis, surf kayaks)
	<b>Image content</b> Human figure (right-hand profile), surfboard, two wavy lines, three curved lines
<b>Hazard</b> Surf craft being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not using surf craft	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P060</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No outdoor footwear</b></p>
	<b>Function</b> To prohibit the wearing of outdoor footwear
	<b>Image content</b> Outdoor footwear
<b>Hazard</b> Slipping or falling or the spreading of contamination caused by the wearing of inappropriate footwear for the surface being walked upon	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not wearing outdoor footwear or ensuring that footwear is protected by overshoes	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P061</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No jumping into water</b></p>
	<b>Function</b> <p>To prohibit jumping into the water</p>
	<b>Image content</b> <p>Human figure with arms raised, jumping, filled segment, two wavy lines</p>
<b>Hazard</b> <p>Being struck by person jumping into the water</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>No jumping into the water</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-P062</p>
	<p><b>Referent</b></p> <p>No pushing into water</p>
	<p><b>Function</b></p> <p>To prohibit pushing people into the water</p>
	<p><b>Image content</b></p> <p>Two human figures, one figure pushing the other figure, filled segment, two wavy lines</p>
<p><b>Hazard</b></p> <p>Being struck by the person pushed into the water</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not pushing people into the water</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P063</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No body boarding</b></p>
	<b>Function</b> To prohibit body boarding (or boogie boarding)
	<b>Image content</b> Human figure (right-hand profile), body board, two wavy lines
<b>Hazard</b> Body boards being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No body boarding	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P064</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>No surfing between the red-and-yellow flags</b></p>
	<p><b>Function</b></p> <p>To prohibit people using surf craft in designated swimming areas</p>
	<p><b>Image content</b></p> <p>Human figure (right-hand profile) on surfboard, two wavy lines, three curved lines, between two red-and-yellow rectangular shapes at the top of two vertical lines</p>
<p><b>Hazard</b></p> <p>Surf craft being in an area where they could collide with people in the water, between two red-and-yellow flags</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>No surf craft in designated swimming areas</p>	
<p><b>Additional information</b></p> <p>It is essential for the flags to be shown in this particular safety sign in the colours in which they are always used on the beach (and specified in ISO 20712-2:2007 as flag BF.03) to ensure understanding of the safety message and avoid confusion with other flags. In these unique circumstances, the red and yellow colours of this element of the graphical symbol are shown, in addition to the normal contrast colour of black.</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P065</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No kite surfing</b></p>
	<b>Function</b> To prohibit kite surfing
	<b>Image content</b> Human figure (right-hand profile) on surfboard, kite, two wavy lines, three curved lines
<b>Hazard</b> Kite surfers being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No kite surfing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-P066</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>No parasailing</b></p>
	<b>Function</b> To prohibit parasailing
	<b>Image content</b> Human figure with parasail, tow rope, mechanically powered craft, two wavy lines
<b>Hazard</b> Parasailors and mechanically powered craft being in an area where they could collide with people on or in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No parasailing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P067
	<b>Referent</b> No sand yachting
	<b>Function</b> To prohibit sand yachting
	<b>Image content</b> Sand yacht, sail, vertical line, horizontal line, two wheels
<b>Hazard</b> Sand yachts being in an area where they could collide with people on the beach	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> No sand yachting	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P068</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not expose to direct sunlight or hot surface</b></p>
	<p><b>Function</b></p> <p>To prohibit exposure to direct sunlight or hot surface</p>
	<p><b>Image content</b></p> <p>Three parallel, vertical, s-shaped lines above a horizontal straight line and circle with radiating straight lines</p>
<p><b>Hazard</b></p> <p>Raised temperature due to direct sunlight or placement on hot surface can cause a harmful explosion</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not leaving the product exposed to direct sunlight or hot surface</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 6 (continued)

	<b>Reference No.</b> ISO 7010-P069
	<b>Referent</b> Not to be serviced by users
	<b>Function</b> To prohibit carrying out servicing by users
	<b>Image content</b> Screwdriver, open ended wrench (spanner)
<b>Hazard</b> Injury by hazards not recognizable by users	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Unqualified users not carrying out servicing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 6 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-P070</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Do not put finger into the nozzle of a hydromassage</b></p>
	<p><b>Function</b></p> <p>To prohibit putting a finger into the nozzle of a hydromassage</p>
	<p><b>Image content</b></p> <p>Hand with finger pointing into nozzle of water jet spray</p>
<p><b>Hazard</b></p> <p>Suction and entrapment of a single finger in the nozzle of a hydromassage, finger injuries, drowning in case of small children</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Not putting finger into the nozzle of a hydromassage</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 — Description and application of referent for warning signs (category W)

	<b>Reference No.</b> ISO 7010-W001
	<b>Referent</b> General warning sign
	<b>Function</b> To signify a general warning
	<b>Image content</b> Exclamation mark
<b>Hazard</b> Risk to people specified by the supplementary sign	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care regarding the hazard specified by the supplementary sign	
<b>Additional information</b> This safety sign cannot be used on its own and requires a supplementary sign to give further information about the hazard.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W002</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Explosive material</b></p>
	<p><b>Function</b></p> <p>To warn of explosive materials</p>
	<p><b>Image content</b></p> <p>Part of filled circle with radiating triangular lines and irregular shapes</p>
<p><b>Hazard</b></p> <p>Explosion</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when in the vicinity of or handling explosive materials</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W003
	<b>Referent</b> Warning; Radioactive material or ionizing radiation
	<b>Function</b> To warn of radioactive materials or ionizing radiation
	<b>Image content</b> Circle with three circular sectors around it
<b>Hazard</b> Radioactivity and ionizing radiation	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid exposure to radioactive material or ionizing radiation	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

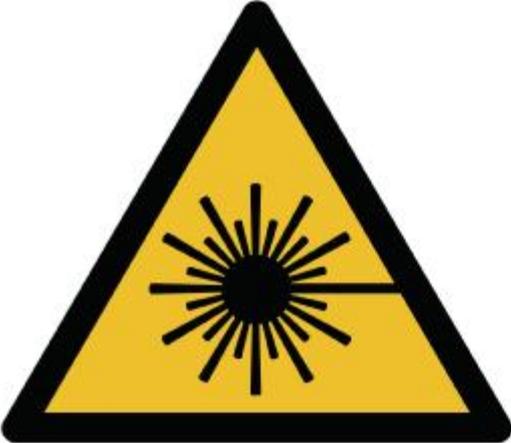
	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W004</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Laser beam</b></p>
	<p><b>Function</b></p> <p>To warn of a laser beam</p>
	<p><b>Image content</b></p> <p>Circle with 24 regular equally spaced radiating lines, 12 shorter of equal length, 11 longer of equal length and one longer reaching horizontally the right-hand side of the triangle</p>
<p><b>Hazard</b></p> <p>Laser beam</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid exposure to a laser beam</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W005
	<b>Referent</b> Warning; Non-ionizing radiation
	<b>Function</b> To warn of non-ionizing radiation
	<b>Image content</b> Circle with three arc-shaped lines of increasing length on each side symmetrically located, with a trapezoid underneath
<b>Hazard</b> Non-ionizing radiation	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid exposure to non-ionizing radiation	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W006</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Magnetic field</b></p>
	<b>Function</b> <p>To warn of a magnetic field</p>
	<b>Image content</b> <p>Hoop with two outlined sections at the bottom, two arc-shaped lines on each side of the outlined section</p>
<b>Hazard</b> <p>Strong magnetic field</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid exposure to a strong magnetic field</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W007
	<b>Referent</b> Warning; Floor-level obstacle
	<b>Function</b> To warn of a floor-level obstacle
	<b>Image content</b> Human figure falling forwards, thick horizontal line by forward leg
<b>Hazard</b> Floor-level obstacle	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of a floor-level obstacle	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p><b>ISO 7010-W008</b></p>
	<p><b>Referent</b></p> <p><b>Warning; Drop (fall)</b></p>
	<p><b>Function</b></p> <p>To warn of a drop</p>
	<p><b>Image content</b></p> <p>Human figure falling backwards from the edge of a surface</p>
<p><b>Hazard</b></p> <p>Drop</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when in the vicinity of a drop</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W009
	<b>Referent</b> Warning; Biological hazard
	<b>Function</b> To warn of a biological hazard
	<b>Image content</b> Circle overlaid by three equal pincer-shaped circles
<b>Hazard</b> Virus or toxin	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid exposure to a biological hazard	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W010
	<b>Referent</b> Warning; Low temperature/ freezing conditions
	<b>Function</b> To warn of low temperature or freezing conditions
	<b>Image content</b> Snowflake
<b>Hazard</b> Low temperature or freezing conditions	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid exposure to low temperature or freezing conditions	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W011</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Slippery surface</b></p>
	<b>Function</b> <p>To warn of a slippery surface</p>
	<b>Image content</b> <p>Human figure falling backwards, horizontal line underneath</p>
<b>Hazard</b> <p>Slippery surface</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid a slippery surface or being aware of it, taking care to avoid slipping</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

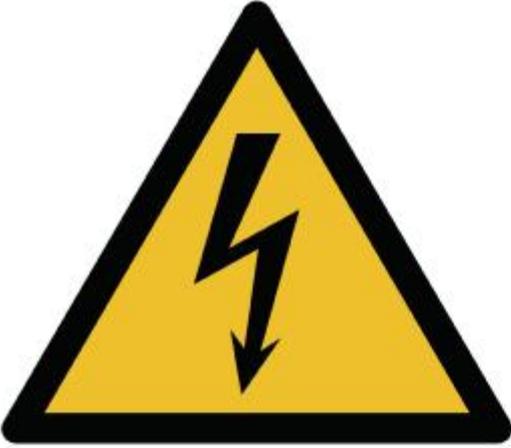
	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W012</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Electricity</b></p>
	<b>Function</b> To warn of electricity
	<b>Image content</b> Lightning bolt
<b>Hazard</b> Electricity	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid coming into contact with electricity	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W013
	<b>Referent</b> Warning; Guard dog
	<b>Function</b> To warn of a guard dog
	<b>Image content</b> Head of a dog (left-hand profile) with collar
<b>Hazard</b> Guard dog	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Not entering an area patrolled by a guard dog without ensuring that the dog is under control	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W014</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Forklift trucks and other industrial vehicles</b></p>
	<p><b>Function</b></p> <p>To warn of a forklift truck and other industrial vehicles</p>
	<p><b>Image content</b></p> <p>Forklift truck (left-hand profile) with human figure</p>
<p><b>Hazard</b></p> <p>Moving forklift trucks and other industrial vehicles</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid collision with moving forklift trucks and other industrial vehicles</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W015
	<b>Referent</b> Warning; Overhead load
	<b>Function</b> To warn of an overhead load
	<b>Image content</b> Box suspended at an angle from two ropes attached to a hook
<b>Hazard</b> Overhead load	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid being struck by or walking into an overhead load	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W016</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Toxic material</b></p>
	<p><b>Function</b></p> <p>To warn of toxic material</p>
	<p><b>Image content</b></p> <p>Skull (outlined), behind it two crossed bones (outlined)</p>
<p><b>Hazard</b></p> <p>Poisoning</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid coming into contact with toxic material</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W017
	<b>Referent</b> Warning; Hot surface
	<b>Function</b> To warn of a hot surface
	<b>Image content</b> Three parallel, vertical, s-shaped lines above a horizontal straight line
<b>Hazard</b> Hot surface	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid coming into contact with a hot surface	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W018</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Automatic start-up</b></p>
	<b>Function</b> <p>To warn of automatic activation</p>
	<b>Image content</b> <p>Circle with three connected curved lines</p>
<p><b>Hazard</b> Automatically moving mechanical parts</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of machinery with moving mechanical parts which may start automatically and thus unexpectedly</p> <p><b>Additional information</b> The graphical symbol is standardized and registered as ISO 7000-0017 "Automatic control (closed loop)". Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W019</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Crushing</b></p>
	<p><b>Function</b></p> <p>To warn of moving mechanical parts</p>
	<p><b>Image content</b></p> <p>Human figure between two hatched bars; an arrow from the right side pointing to the right bar and an arrow from the left side pointing to the left bar</p>
<p><b>Hazard</b></p> <p>Mechanical parts which can come together in a crushing movement</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid mechanisms with parts which can come together in a crushing movement</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W020</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Overhead obstacle</b></p>
	<p><b>Function</b></p> <p>To warn of an overhead obstacle</p>
	<p><b>Image content</b></p> <p>Upper human figure underneath an overhead obstacle and star to indicate contact</p>
<p><b>Hazard</b></p> <p>Overhead obstacle</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid being struck by or walking into an overhead obstacle</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W021
	<b>Referent</b> Warning; Flammable material
	<b>Function</b> To warn of flammable material
	<b>Image content</b> Flame, horizontal line underneath
<b>Hazard</b> Fire	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid causing a fire by igniting flammable material	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W022</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Sharp element</b></p>
	<p><b>Function</b></p> <p>To warn of a sharp element</p>
	<p><b>Image content</b></p> <p>Bandaged hand above a vertical line with a point</p>
<p><b>Hazard</b></p> <p>Sharp elements</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid injury from sharp elements (e.g. needles, blades)</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;">ISO 7010-W023</p>
	<p><b>Referent</b></p> <p style="text-align: center;">Warning; Corrosive substance</p>
	<p><b>Function</b></p> <p>To warn of a corrosive substance</p>
	<p><b>Image content</b></p> <p>Hand with indentation, two test tubes, four droplets, thick line with indentation</p>
<p><b>Hazard</b></p> <p>Corrosive substance</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when handling corrosive substances</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W024</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Crushing of hands</b></p>
	<p><b>Function</b></p> <p>To warn of a closing motion of mechanical parts of equipment</p>
	<p><b>Image content</b></p> <p>Hand between two horizontal lines, vertical arrow pointing downwards</p>
<p><b>Hazard</b></p> <p>Closing mechanical parts of equipment</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid injury to hands when in the vicinity of equipment with closing mechanical parts</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W025
	<b>Referent</b> Warning; Counterrotating rollers
	<b>Function</b> To warn of counterrotating rollers
	<b>Image content</b> Small circle with internal curved arrow pointing in anti-clockwise direction, large circle with internal curved arrow pointing in clockwise direction
<b>Hazard</b> Drawing-in movement	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of counterrotating rollers	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W026</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Battery charging</b></p>
	<p><b>Function</b></p> <p>To warn of batteries being charged</p>
	<p><b>Image content</b></p> <p>Box with cross and horizontal short line within; two filled squares directly located on the box above the cross and the horizontal short line; two curved lines above the filled square on the left side and irregular curved filled area at the right side of the box</p>
<p><b>Hazard</b></p> <p>Explosive atmosphere and acid</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Ensuring adequate ventilation of the charging area and taking care to avoid coming into contact with acid</p> <p><b>Additional information</b></p> <p>The graphical symbol is standardized and registered as ISO 7000-1152 "Battery open".</p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W027
	<b>Referent</b> Warning; Optical radiation
	<b>Function</b> To warn of optical radiation
	<b>Image content</b> Star with 11 points with circle in centre
<b>Hazard</b> Optical radiation (such as UV, visible radiation, IR)	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid injury to eyes and skin when in the vicinity of optical radiation	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training. If necessary, a supplementary sign shall be used to give further information about the kind of optical radiation (e.g. UV, visible radiation, IR).	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W028</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Oxidizing substance</b></p>
	<b>Function</b> <p>To warn of an oxidizing substance</p>
	<b>Image content</b> <p>Flame, circle, horizontal line</p>
<b>Hazard</b> <p>Fire</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care when in the vicinity of oxidizing substances</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W029
	<b>Referent</b> Warning; Pressurized cylinder
	<b>Function</b> To warn of a pressurized cylinder
	<b>Image content</b> Cylinder at angle with radiating triangular lines and irregular shapes, flame and horizontal line underneath
<b>Hazard</b> Exploding pressurized cylinder	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Protecting pressurized cylinders from high temperatures or from being dropped or falling	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W030</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Hand crushing between press brake tool</b></p>
	<b>Function</b> <p>To warn of the closing jaws of a press brake tool</p>
	<b>Image content</b> <p>Press brake tool (punch and die), hand between punch and die, arrow pointing downwards</p>
<b>Hazard</b> <p>Closing jaws of a press brake tool</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid hands being caught between the jaws of a press brake tool</p>	
<b>Additional information</b> <p>This safety sign is a specific warning sign for hydraulic press brakes.                  Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W031</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Hand crushing between press brake and material</b></p>
	<b>Function</b> <p>To warn of the danger of hands being caught between a workpiece and the moving parts of a press brake</p>
	<b>Image content</b> <p>Hand crushed between the moving parts of a press brake and a workpiece, curved arrow pointing upwards</p>
<b>Hazard</b> <p>Moving press brake and workpiece</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid hands being caught between a workpiece and the moving parts of a press brake</p>	
<b>Additional information</b> <p>This safety sign is a specific warning sign for hydraulic press brakes.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W032</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Rapid movement of workpiece in press brake</b></p>
	<p><b>Function</b></p> <p>To warn of possible movement/deflection of a workpiece when operating a press brake</p>
	<p><b>Image content</b></p> <p>Protruding workpiece, press brake tool (punch and die), bending press brake operator with damaged head and shoulder, two curved arrows</p>
<p><b>Hazard</b></p> <p>Movement/deflection of a protruding workpiece in a press brake</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid a protruding workpiece in a press brake</p> <p><b>Additional information</b></p> <p>This safety sign is a specific warning sign for press brakes.</p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W033
	<b>Referent</b> Warning; Barbed wire
	<b>Function</b> To warn of barbed wire
	<b>Image content</b> Barbed wire
<b>Hazard</b> Barbed wire	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of barbed wire	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W034</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Bull</b></p>
	<b>Function</b> To warn of bulls
	<b>Image content</b> Bull
<p><b>Hazard</b> Bull attack</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of bulls</p> <p><b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W035
	<b>Referent</b> Warning; Falling objects
	<b>Function</b> To warn of falling objects
	<b>Image content</b> Upper human figure, four vertical lines, four different shapes
<b>Hazard</b> Falling objects	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of potential falling objects	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W036</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Fragile roof</b></p>
	<p><b>Function</b></p> <p>To warn of a fragile roof</p>
	<p><b>Image content</b></p> <p>Human figure on roof, pattern radiating from one foot</p>
<p><b>Hazard</b></p> <p>Fragile roof</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when on a fragile roof</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W037
	<b>Referent</b> <b>Warning; Run over by remote operator-controlled machine</b>
	<b>Function</b> To warn of a run over hazard by a remote operator-controlled machine
	<b>Image content</b> Human figure being run over by wheeled machine (outlined) with antenna, three curved lines
<b>Hazard</b> Moving remote operator-controlled machine	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when in the vicinity of a remote operator-controlled machine	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W038</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning: Sudden loud noise</b></p>
	<b>Function</b> To warn of sudden loud noise
	<b>Image content</b> Human head (front view, outlined), hand, three curved lines
<b>Hazard</b> Sudden loud noise	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care in areas where there can be sudden loud noise	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W039
	<b>Referent</b> Warning; Falling ice
	<b>Function</b> To warn of falling ice from overhead
	<b>Image content</b> Upper human figure underneath falling black triangles with motion streaks
<b>Hazard</b> Falling ice	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid areas where ice falls from overhead structures	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W040</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Roof avalanche</b></p>
	<p><b>Function</b></p> <p>To warn of a roof avalanche</p>
	<p><b>Image content</b></p> <p>Human figure, house with a roof, group of ice crystals in different sizes</p>
<p><b>Hazard</b></p> <p>Falling mass of snow</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when in the vicinity of snow-covered roofs</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W041</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Asphyxiating atmosphere</b></p>
	<b>Function</b> <p>To warn of asphyxiation</p>
	<b>Image content</b> <p>Human figure (right-hand profile) sitting, legs straight, head bent forward and arms hanging, dots around the head and upper body and into the lungs</p>
<b>Hazard</b> <p>Asphyxiation due to exposure to asphyxiating atmosphere</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid exposure to asphyxiating atmosphere</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W042</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Arc flash</b></p>
	<b>Function</b> <p>To warn of an arc flash</p>
	<b>Image content</b> <p>Lightning bolt (from ISO 7010-W012) and a multi-peaked jagged line of varying width</p>
<b>Hazard</b> <p>High energy electrical discharge between two electrically conductive materials</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid opening electrical enclosures unless electrical components are de-energized or specialized personal protective equipment is worn</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-W043</p>
	<b>Referent</b> <p style="text-align: center;">Warning; Thin ice</p>
	<b>Function</b> <p>To warn of going onto thin ice</p>
	<b>Image content</b> <p>Human figure falling, radiating pattern originating from end of leg</p>
<b>Hazard</b> <p>Thin ice which people could fall through</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care when going onto thin ice</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W044</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Slipway</b></p>
	<p><b>Function</b></p> <p>To warn of a boat launching slipway</p>
	<p><b>Image content</b></p> <p>Sailing boat, wheel with bar, solid triangle, two wavy lines</p>
<p><b>Hazard</b></p> <p>Collision with a slipway or trolley being used to launch or retrieve a boat</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>People in the water taking care to avoid the slipway and sailing boats being launched</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;">ISO 7010-W045</p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Towed water activity area</b></p>
	<p><b>Function</b></p> <p>To warn of towed water activity (e.g. water skiing, wakeboarding, doughnuts, banana craft)</p>
	<p><b>Image content</b></p> <p>Human figure (left-hand profile) on water skis, tow rope, two wavy lines</p>
<p><b>Hazard</b></p> <p>Water skis, wakeboards, doughnuts, banana craft or tow ropes being in an area where they could collide with people in the water</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when entering an area of towed water activity</p>	
<p><b>Additional information</b></p> <p>The tow rope needs to extend into the exclusion zone (as specified in ISO 3864-3) in order to convey clearly the image of a continuous tow rope extending outside the visual scene portrayed.</p> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W046</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Surf craft area</b></p>
	<b>Function</b> To warn of surf craft (e.g. surfboards, surf skis, surf kayaks)
	<b>Image content</b> Human figure on surfboard, two wavy lines, three curved lines
<b>Hazard</b> Surf craft being in an area where they could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering an area of surf craft activity	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-W047</p>
	<b>Referent</b> <p style="text-align: center;">Warning; Deep water</p>
	<b>Function</b> <p>To warn of deep water</p>
	<b>Image content</b> <p>Human figure with raised arm, single wavy line, double-ended arrow pointing between the single wavy line and a horizontal line</p>
<b>Hazard</b> <p>Area of water where people could get out of their depth</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care when entering an area of deep water</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p> <p>A supplementary text sign may be used to give the depth of water.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W048</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Shallow water (diving)</b></p>
	<p><b>Function</b></p> <p>To warn of diving into shallow water</p>
	<p><b>Image content</b></p> <p>Human figure diving, head in contact with horizontal line, single wavy line</p>
<p><b>Hazard</b></p> <p>Area of shallow water where people, if they dived, could strike the floor</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when diving in shallow water</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p>ISO 7010-W049</p>
	<p><b>Referent</b></p> <p>Warning; Submerged objects</p>
	<p><b>Function</b></p> <p>To warn of diving onto submerged objects in open water</p>
	<p><b>Image content</b></p> <p>Human figure diving, head and an arm in contact with objects, single wavy line</p>
<p><b>Hazard</b></p> <p>Area of water where people, if they dived, could strike submerged objects</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid striking submerged objects</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W050</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Sudden drop in swimming or leisure pools</b></p>
	<b>Function</b> <p>To warn of a sudden drop beneath water</p>
	<b>Image content</b> <p>Human figure falling, slope, horizontal line, single wavy line</p>
<b>Hazard</b> <p>Drop/slope under the water where people could get out of their depth</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care to avoid sudden drops under the water or being suitably aware of the hazard</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W051</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Unprotected edge</b></p>
	<b>Function</b> <p>To warn of an unprotected edge to an aquatic environment (e.g. at parking area, dock side)</p>
	<b>Image content</b> <p>Car falling, edge of a land mass, two wavy lines</p>
<b>Hazard</b> <p>Vehicle falling over edge</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care when driving to avoid going over an unprotected edge of an aquatic environment</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W052</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Unstable cliff edge</b></p>
	<p><b>Function</b></p> <p>To warn of an unstable cliff edge</p>
	<p><b>Image content</b></p> <p>Human figure falling, edge of land mass, vertical line of three irregularly shaped dots</p>
<p><b>Hazard</b></p> <p>Falling off cliff</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid cliff edges</p>	
<p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W053
	<b>Referent</b> Warning; Unstable cliff
	<b>Function</b> To warn of rocks from unstable cliff
	<b>Image content</b> Human figure, irregularly shaped land mass, group of four irregular shapes
<b>Hazard</b> Falling rocks, unstable cliffs	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid being under cliffs that may be unstable	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)

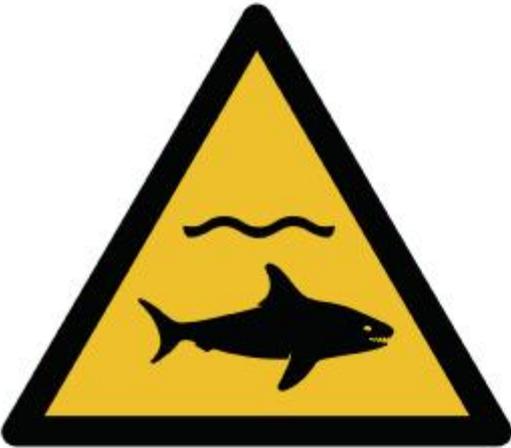
	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W054</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Shark</b></p>
	<b>Function</b> To warn of sharks
	<b>Image content</b> Shark, single wavy line
<b>Hazard</b> Shark attack	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering the water due to the presence of dangerous sharks	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W055
	<b>Referent</b> Warning; Sewage effluent outfall
	<b>Function</b> To warn of sewage effluent outfall
	<b>Image content</b> Cylindrical shape, three curved lines, two wavy lines
<b>Hazard</b> Flow of discharged water and unhygienic material	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care to avoid the discharge from the effluent outfall	
<b>Additional information</b> The discharging pipe and ground may be dry. Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W056</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Tsunami hazard zone</b></p>
	<p><b>Function</b></p> <p>To warn of tsunami waves</p>
	<p><b>Image content</b></p> <p>Rolling shape of a tsunami wave</p>
<p><b>Hazard</b></p> <p>Tsunami wave originating from an ocean floor seismic event in which people could be caught</p>	
<p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Evacuation from coastal/beach zone towards higher ground inland in the event of an earthquake or when a tsunami warning has been issued</p>	
<p><b>Additional information</b></p> <p>This water safety sign has been the subject of extensive research by the Japanese Government and has also been requested by UNESCO as part of an overall approach to a management strategy designed to mitigate the disastrous effects of a tsunami wave. The design selected has received the best comprehension results and is specific to the special circumstances of the tsunami hazard. Supplementary text shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p> <p>The particular circumstances of the tsunami wave and its nature as a vast volume of water indicated that, for exceptional reasons, the "exclusion zone" (as specified in ISO 3864-3) should be entered to gain the best comprehension test results.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-W057</p>
	<b>Referent</b> <p style="text-align: center;">Warning; Strong currents</p>
	<b>Function</b> <p>To warn of strong currents</p>
	<b>Image content</b> <p>Upper human figure with arms raised, two wavy lines with arrow heads</p>
<b>Hazard</b> <p>Strong currents hazardous to people undertaking aquatic activity</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care when entering the water where there can be strong currents</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W058</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Boating area</b></p>
	<p><b>Function</b></p> <p>To warn of boats (e.g. manually powered craft, mechanically powered craft, sailing craft)</p>
	<p><b>Image content</b></p> <p>Bow of boat with anchor, upper human figure with arms raised, two wavy lines</p>
<p><b>Hazard</b></p> <p>Boats could collide with people in the water</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care when entering areas where there is boat activity</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W059
	<b>Referent</b> Warning; Sand yachting
	<b>Function</b> To warn of sand yachting
	<b>Image content</b> Sand yacht, sail, vertical line, horizontal line, two wheels
<b>Hazard</b> Sand yachts could collide with people on the beach	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering areas where there is sand yachting	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <b>ISO 7010-W060</b>
	<b>Referent</b> <b>Warning; Incoming tides</b>
	<b>Function</b> To warn of incoming tides
	<b>Image content</b> Human figure with arms raised standing between a high land mass and waves
<b>Hazard</b> Incoming tides that could cause people to become trapped	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering areas which could be cut off by incoming tides	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W061
	<b>Referent</b> Warning; Quicksand or mud/deep mud or silt
	<b>Function</b> To warn of quicksand or mud
	<b>Image content</b> Upper human figure with arms raised, solid mass
<b>Hazard</b> Quicksand or deep mud in which people could become trapped	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering areas of quicksand or mud	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W062</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning; Kite surfing</b></p>
	<b>Function</b> To warn of kite surfing
	<b>Image content</b> Human figure, surfboard, kite, two wavy lines, two curved lines
<b>Hazard</b> Kite surfers could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering areas where there is kite surfing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W063
	<b>Referent</b> Warning; Parasailing
	<b>Function</b> To warn of parasailing
	<b>Image content</b> Human figure with parasail, tow rope, mechanically powered craft, two wavy lines
<b>Hazard</b> Parasailors and mechanically powered craft could collide with people in the water	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering areas where there is parasailing	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;"><b>ISO 7010-W064</b></p>
	<b>Referent</b> <p style="text-align: center;"><b>Warning: Strong winds</b></p>
	<b>Function</b> To warn of strong winds
	<b>Image content</b> Windsock, two ropes, vertical line
<p><b>Hazard</b>                  Strong winds can sweep people on or in the water away from the shore</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b>                  Taking care when going out on, or into, the water when there are strong winds</p> <p><b>Additional information</b>                  Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> ISO 7010-W065
	<b>Referent</b> <b>Warning; High surf or large breaking waves</b>
	<b>Function</b> To warn of high surf or large breaking waves
	<b>Image content</b> Wave with a high rolling shape above human figure falling backwards
<b>Hazard</b> Large, rapidly moving mass of water in which people could be caught	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> Taking care when entering the water or getting too close to the water's edge, when there are large breaking waves	
<b>Additional information</b> Test data obtained according to ISO 9186-1 are not available from more than one country. Findings from national testing, however, showed that in one country the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.	

Table 7 (continued)

	<p><b>Reference No.</b></p> <p style="text-align: center;"><b>ISO 7010-W066</b></p>
	<p><b>Referent</b></p> <p style="text-align: center;"><b>Warning; Deep shelving beach</b></p>
	<p><b>Function</b></p> <p>To warn of deep shelving beach</p>
	<p><b>Image content</b></p> <p>Human figure falling, edge of a land mass, six wavy lines</p>
<p><b>Hazard</b></p> <p>Sudden drop to deep water at the edge of a land mass, such as a beach, where people could fall unexpectedly because of the sudden change in the depth of the water</p> <p><b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b></p> <p>Taking care to avoid sudden drops under the water or, being aware of these, taking suitable action when approaching them</p> <p><b>Additional information</b></p> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign did not reach the criteria of acceptability. Consequently, a supplementary text sign shall be used to increase comprehension except when the safety sign is supplemented by manuals, instructions or training.</p>	

Table 7 (continued)

	<b>Reference No.</b> <p style="text-align: center;">ISO 7010-W067</p>
	<b>Referent</b> <p style="text-align: center;">Warning; Crocodiles, alligators or caymans</p>
	<b>Function</b> <p>To warn of crocodiles, alligators or caymans</p>
	<b>Image content</b> <p>Reptile head with open jaws, two wavy lines</p>
<b>Hazard</b> <p>Crocodile, alligator or cayman attack</p>	
<b>Human behaviour that is intended to be caused after understanding the safety sign's meaning</b> <p>Taking care in areas where crocodiles, alligators or caymans can be present</p>	
<b>Additional information</b> <p>Test data obtained according to ISO 9186-1 are available from more than one country. Findings from testing showed that the safety sign exceeded the criteria of acceptability. A supplementary text sign may be used to increase comprehension. If the safety sign is supplemented by manuals, instructions or training, a supplementary text sign may not be required.</p>	

## Bibliography

- [1] ISO 3864-2, *Graphical symbols — Safety colours and safety signs — Part 2: Design principles for product safety labels*
- [2] ISO 3864-4, *Graphical symbols — Safety colours and safety signs — Part 4: Colorimetric and photometric properties of safety sign materials*
- [3] ISO 7000, *Graphical symbols for use on equipment — Registered symbols*
- [4] ISO 7001, *Graphical symbols — Public information symbols*
- [5] ISO 9186-1, *Graphical symbols — Test methods — Part 1: Method for testing comprehensibility*
- [6] ISO 9186-2, *Graphical symbols — Test methods — Part 2: Method for testing perceptual quality*
- [7] ISO 9186-3, *Graphical symbols — Test methods — Part 3: Method for testing symbol referent association*
- [8] ISO 16069, *Graphical symbols — Safety signs — Safety way guidance systems (SWGS)*
- [9] ISO 17398, *Safety colours and safety signs — Classification, performance and durability of safety signs*
- [10] ISO 20712-2, *Water safety signs and beach safety flags — Part 2: Specifications for beach safety flags — Colour, shape, meaning and performance*



**ISO 7010:2019(E)**

---

---

**ICS 01.080.20; 01.080.10**

Price based on 298 pages

© ISO 2019 – All rights reserved

**This page has been left intentionally blank.**